

GS 04L42B01-01E

### OVERVIEW

The DX2000 is a DAQSTATION that displays real-time measured data on a color LCD and saves data on a CompactFlash memory card (CF card). It can be hooked up to network via Ethernet, which enables to inform by E-mail and to monitor on Web site as well as to transfer files by using FTP. Also, it can communicate with Modbus/RTU or Modbus/TCP.

It comes with a four, eight, ten, twenty, thirty, forty-channel or forty eight-channel model. As the input signal, a DC voltage, thermocouple, resistance temperature detector, or contact signal can be set to each channel. The data saved on a CF card can be converted by data conversion software to Lotus 1-2-3, Excel, or ASCII format file, facilitating processing on a PC. Not only this, the Viewer software allows a PC to display waveforms on its screen and to print out waveforms.



### STANDARD SPECIFICATIONS

#### General Specifications

##### Construction

- Mounting: Flush panel mounting (on a vertical plane)  
Mounting may be inclined downward up to 30 degrees from a horizontal plane.
- Allowable panel thickness: 2 to 26 mm
- Material: Case: drawn steel  
Bezel: polycarbonate  
Display filter: polycarbonate
- Case color: Case: Grayish blue green (Munsell 2.0B 5.0/1.7 or equivalent)  
Bezel: Charcoal grey light (Munsell 10B 3.6/0.3 or equivalent)
- Front panel: Water and dust-proof\* (based on IEC529-IP65 and NEMA No.250 TYPE4 for indoor locations (except external icing test))  
\*Except for side-by-side mounting.
- Dimensions: 288 (W) × 288 (H) × 221.6 (D) mm  
288 (W) × 288 (H) × 226 (D) \*mm  
\*In case of /H2 or /PM1 option is specified.
- Weight: DX2004, DX2010: approx. 6.0 kg\*  
DX2008, DX2020: approx. 6.3 kg\*  
DX2030 : approx. 6.9 kg\*  
DX2040, DX2048: approx. 7.3 kg\*  
\*without optional features

##### Input

- Number of inputs:
  - DX2004: four channels
  - DX2008: eight channels
  - DX2010: ten channels
  - DX2020: twenty channels
  - DX2030: thirty channels
  - DX2040: forty channels
  - DX2048: forty eight channels
- Measurement interval:
  - DX2004, DX2008: 125 ms, 250 ms, 25 ms (fast sampling mode\*)
  - DX2010, DX2020, DX2030, DX2040, DX2048: 1 s (Not available when A/D integration time is set to 100 ms), 2 s, 5 s, 125 ms (fast sampling mode\*)
  - \* A/D integration time is fixed to 1.67 ms in case of fast sampling mode.
- Inputs: DCV (DC voltage), TC (thermocouple), RTD (resistance temperature detector), DI (digital input for event recording), DCA (DC current with external shunt resistor attached)

Input type	Range	Measuring range	
DCV	20 mV	-20.000 to 20.000 mV	
	60 mV	-60.00 to 60.00 mV	
	200 mV	-200.00 to 200.00 mV	
	2 V	-2.0000 to 2.0000 V	
	6 V	-6.000 to 6.000 V	
	1-5V	-0.800 to 5.200 V	
	20 V	-20.000 to 20.000 V	
	50 V	-50.00 to 50.00 V	
TC	R <sup>*1</sup>	0.0 to 1760.0°C	32 to 3200°F
	S <sup>*1</sup>	0.0 to 1760.0°C	32 to 3200°F
	B <sup>*1</sup>	0.0 to 1820.0°C	32 to 3308°F
	K <sup>*1</sup>	-200.0 to 1370.0°C	-328 to 2498°F
	E <sup>*1</sup>	-200.0 to 800.0°C	-328.0 to 1472.0°F
	J <sup>*1</sup>	-200.0 to 1100.0°C	-328.0 to 2012.0°F
	T <sup>*1</sup>	-200.0 to 400.0°C	-328.0 to 752.0°F
	N <sup>*1</sup>	-270.0 to 1300.0°C	-454 to 2372°F
	W <sup>*2</sup>	0.0 to 2315.0°C	32 to 4199°F
	L <sup>*3</sup>	-200.0 to 900.0°C	-328.0 to 1652.0°F
	U <sup>*3</sup>	-200.0 to 400.0°C	-328.0 to 752.0°F
	WR <sup>e*4</sup>	0.0 to 2400.0°C	32 to 4352°F
RTD	Pt100 <sup>*5</sup>	-200.0 to 600.0°C	-328.0 to 1112.0°F
	JPt100 <sup>*5</sup>	-200.0 to 550.0°C	-328.0 to 1022.0°F
DI	DCV input	OFF : less than 2.4 V	
	(TTL)	ON : more than 2.4 V	
	Contact input	Contact ON/OFF	

\*1 R, S, B, K, E, J, T, N: IEC584-1 (1995), DIN IEC584, JIS C 1602-1995

\*2 W: W-5% Re/W-26% Re (Hoskins Mfg. Co.), ASTM E988

\*3 L: Fe-CuNi, DIN43710, U: Cu-CuNi, DIN43710

\*4 WR<sup>e</sup>: W-3%Re/W-25%Re (Hoskins Mfg. Co.)

\*5 Pt100: JIS C 1604-1997, IEC 751-1995, DIN IEC751-1996

JPt100: JIS C 1604-1989, JIS C 1606-1989

Measuring current: i = 1mA

**A/D integration time:**

20 ms (50 Hz), 16.7 ms (60 Hz), 100ms (50/60Hz for DX2010/2020/2030/2040/2048), or AUTO selectable (automatic selection by detection of power supply frequency)  
A/D integration time is fixed to 1.67 ms (600Hz) in case of fast sampling mode.

**Thermocouple burnout:**

Burnout upscale/downscale function can be switched on/off (for each channel).  
Burnout upscale/downscale selectable  
Normal: Less than 2 kΩ, Burn out: More than 100 kΩ  
Detection current: approx. 10 μ A

**1-5V range burnout:**

Burnout upscale/downscale function can be switched on/off (for each channel).  
Burnout upscale/downscale selectable  
Upscale burnout: More than +10% of configured span  
Downscale burnout: Less than -5% of configured span

**Moving average:**

Moving average on/off selectable for each channel  
Moving average cycles 2 to 400 selectable

**Calculation:**

**Differential computation:**

Between any two channels  
Available for DCV, TC, RTD and DI ranges.

**Linear scaling:**

Available for DCV, TC, RTD and DI ranges.  
Scaling limits: -30000 to 30000  
Decimal point: user-selectable  
Engineering unit: user-definable, up to 6 characters  
Over value: Exceeds ± 5% of scaling limits (on/off selectable)

**Square root:**

Available for DCV range.  
Scaling limits: -30000 to 30000  
Decimal point: user-selectable  
Engineering unit : user-definable, up to 6 characters  
Low level cut off: 0.0 to 5.0% of display span  
Over value: Exceeds ± 5% of scaling limits (on/off selectable)

**1-5VDC scaling:**

Available for 1-5VDC range.  
Scaling limits: -30000 to 30000  
Display span limit: 0.800 to 5.200  
Decimal point: user-selectable  
Engineering unit : user-definable, up to 6 characters  
Low level cut off: Fixed to lower span limit  
Over value: Exceeds ± 5% of scaling limits (on/off selectable)

**Display**

**Display unit:**

10.4-inch TFT color LCD (VGA, 640 x 480 pixels)

Note) In the part of crystal display, there are some pixels that can't always turn on or off. Please understand that the brightness of screen looks uneven because of characteristics of crystal display, but it is not out of order.

**Display group:**

Each measurement channel and computation channel can be assigned to display group of the trend, digital and bargraph display.

Number of display: 36 groups  
Number of assignable channels for one group: 10 channels

**Display color:**

Trend/Bargraph:  
Selectable from 24 colors

Background:  
White or black selectable

**Trend display:**

Trend display type:  
Vertical, horizontal, landscape, horizontal split or circular selectable

Number of indication channels:  
10 channels per display (maximum)

Number of display:  
36 displays (36 groups)

Line width:  
1, 2, and 3 pixels selectable

Scales:  
Maximum 10 scales.  
Bargraph, green band area and alarm mark can be displayed on scale display.  
Number of divisions: Selectable from 4 to 12 or C10 (10 divisions by main scale mark and scale values are displayed on 0, 30, 50, 70 and 100% position).

Waveform span rate: 5, 10, 15, 30 sec., 1, 2, 5, 10, 15, 20, 30 min., 1, 2, 4, 10 hours/div selectable (5, 10 sec/div is available for only DX2004 and DX2008)	Tags: Display the tag number and tag comment. Tag number: Number of characters: 16 characters maximum
Circular waveform span rate: 20, 30 min., 1, 2, 6, 8, 12, 16 hours, 1, 2 days, 1, 2, 4 weeks/rev selectable (20 min/rev is available for only DX2004 and DX2008)	Tag comment: Number of characters: 32 characters maximum
Bargraph display: Direction: Vertical or horizontal selectable Number of indication channels: 10 channels per display Number of display: 36 displays (36 groups)	Messages: Number of characters: 32 characters maximum Number of messages: 100 messages (including 10 free messages) Message adding function: Message can be added on historical display.
Scales: Green band area and alarm mark can be displayed on scale display. Number of divisions: Selectable from 4 to 12 Reference position: Left, right or center	Other display contents: Status display area: Date & time (year/month/day, hour:minute:second), batch name (batch number + lot number), login user name, display name, internal memory status, status indication icon
Display renewal rate: 1 s	Trend display area: Grid lines (number of divisions selectable from 4 to 12), hour : minutes on grid, trip levels (line widths are selectable from 1, 2 and 3 pixels)
Digital indication: Number of indication channels: 10 channels per display Number of display: 36 displays (36 groups) Display renewal rate: 1 s	Data referencing function: Display the retrieved data (display data or event data) from internal or external memory. Display format: Whole display or divided to 2 areas Time axis operation: Display magnification or reduction, scroll by key operation
Overview display: Number of indication channels: Measuring values and alarm status of all channels	Data searching operation: Display the retrieved data from internal memory by specifying date and time.
Information display: Alarm summary display: Display the list of latest 1000 alarms summary. Jump to historical trend display by cursor pointing.	Display auto scroll function: Display group of monitor display (trend display, bargraph display and digital display) automatically changes in a preset interval (5, 10, 20, 30 s and 1 min).
Message summary display: Display the list of latest 450 messages and time. Jump to historical trend display by cursor pointing.	Sign record: Only for /AS1 option
Memory information: Display the file list in internal memory. Jump to historical trend display by cursor pointing.	LCD saver function: The LCD backlight automatically dims or off (selectable) if no key is touched for a certain preset time (can be set from 1, 2, 5, 10, 30, and 60 min).
Report information: Display the report data in internal memory.	Display register function: Up to 8 display types can be registered with display name.
Modbus status: Display the Modbus status.	Display auto return function: The display type automatically returns to registered display type if no key is touched for a certain preset time (can be set from 1, 2, 5, 10, 20, 30 and 60 min)
Relay status: Display the on/off status of internal switch and relay output.	Temperature unit: °C or °F selectable
Stacked bar graph display: Display the periodic sums of report data.	Custom display function: Display can be customized by lay outing display parts. Display data is saved in internal memory or external medium. Number of customized display: 28 displays maximum (3 in internal memory and 25 in external medium)
Event switch status: Display the event switch status.	
Log display: Log display types: Login log*1, error log, communication log, FTP log, Web log, E-mail log, SNMP log, DHCP log, Modbus log, operation log*2, setting change log*2 *1 operation log when the /AS1 option is installed *2 only for /AS1 option	

Display part:

- General parts (digital, bar, label, tag number, tag comment, system icon, Modbus input, etc)
- Scale parts
- Trend parts
- List parts (alarm list, message list)
- Figure parts (line, rectangle, circle)

Edit function:

Select parts, grid, edit parts (move, resize, property, copy, paste, layout order change, dependency of visual property), group control, delete, save display

Custom display data:

Contents: Display contents data (for each display)  
 Format: Text  
 Output: External medium

Custom display data save/load:

Each or all custom display data file can be saved in specified directory.  
 Custom display data can be loaded from specified directory.

**Data Saving Function**

External storage medium:

Medium: CompactFlash memory card (CF card)  
 Format: FAT16 or FAT32

Internal memory:

Medium: Flash memory  
 Capacity: 400MB

Maximum number of files can be saved:  
 400 files (total number of display data file and event data file)

Manual saving:

Data files in internal memory can be saved manually. Selectable form all data saving or selected data saving.  
 Drive: CF card or USB flash drive (only for USB option)

Automatic saving:

Display data:  
 Periodic saving to CF card

Event data:  
 In case of trigger free...Periodic saving to CF card  
 In case of using trigger...Save the data when sampling is finished

Media FIFO function :  
 Allows the oldest file to be deleted and the newest file to be saved if the free space on the CF card is insufficient (on/off selectable).

Data Saving Period:

Display data file:  
 Linked with the waveform span rate

Event file: Linked with the specified sampling period

Event File Sampling Period:

DX2004, DX2008:  
 Selectable from 25, 125, 250, 500 ms, and 1, 2, 5, 10, 30, 60, 120, 300, 600, 900, 1200 and 1800 s\*

DX2010, DX2020, DX2030, DX2040, DX2048:  
 Selectable from 125, 250, 500 ms, and 1, 2, 5, 10, 30, 60, 120, 300, 600, 900, 1200 and 1800 s\*

\*Sampling period faster than measurement interval can not be selected.

Measurement data File:

The following two file types can be created.  
 Event file (stores instantaneous values sampled periodically at a specified sampling rate)  
 Display data file (stores the maximum and minimum values for each waveform span rate from among measured data sampled at measurement intervals)

Files can be created in the following combinations.

- (a) Event file + display data file
- (b) Display data file only
- (c) Event file only

Data format: YOKOGAWA private format (Binary)

Maximum data size per file:  
 8,000,000 byte (8MB)

Data per channel:

Display data file:  
 Measurement data.....4 byte/data  
 Mathematical data.....8 byte/data  
 External channel data..4 byte/data

Event data file:  
 Measurement data.....2 byte/data  
 Mathematical data.....4 byte/data  
 External channel data..2 byte/data

Sampling time:

The sampling time per file (8MB) during manual data saving can be determined by the formula "number of data items per channel x interval of data saving."

This logic is explained in more detail below:

- 1) When handling display data files only  
 If we assume that the number of measuring channels is 30, the number of computing channels is 10, and the display update interval is 30 min/div (60 sec waveform span rate), then:  
 Number of data items per channel = 8,000,000 bytes/(8 bytes(time stamp) + 30 x 4 bytes + 10 x 8 bytes) = 38,462 data items  
 Sampling time per file = 38,462 x 60 sec = 2,307,720 sec = approx. 26 days
- 2) When handling event files only  
 If we assume that the number of measuring channels is 30, the number of computing channels is 10, and the data saving interval is 1 sec, then :  
 Number of data items per channel = 8,000,000 bytes/(8 bytes(time stamp) + 30 x 2 bytes + 10 x 4 bytes) = 74,074 data items  
 Sampling time per file = 74,074 x 1 sec = 74,074 sec = approx. 20 hours
- 3) When handling both display data files and event files  
 The sampling time is calculated by defining the size of data items in a display data file as 8,000,000 bytes and the size of data items in an event data file as 8,000,000 bytes. The method of calculation is the same as shown above.

Examples of Sampling Time for 1 file (8MB)\*:

\*If sampling time exceeds 31 days, data file is divided.

**In case measurement ch = 8 ch, mathematical ch = 0 ch**

**Display data file (approx.)**

<b>Waveform span rate (time/div)</b>	15 s	30 s	1 min	2 min	5 min	10 min
<b>Data saving period</b>	0.5 s	1 s	2 s	4 s	10 s	20 s
<b>Sampling time</b>	27.8 h	2 days	4 days	9 days	23 days	46 days

**Event data file (approx.)**

<b>Data saving period</b>	25 ms	125 ms	0.5 s	1 s	2 s	5 s	10 s
<b>Sampling time</b>	2.3 h	11.6 h	46.3 h	3 days	7 days	19 days	38 days

**In case measurement ch = 48 ch, mathematical ch = 60 ch**

**Display data file (approx.)**

<b>Waveform span rate (time/div)</b>	15 s	1 min	5 min	10 min	20 min	30 min	1 h	2 h
<b>Data saving period</b>	0.5 s	2 s	10 s	20 s	40 s	1 min	2 min	4 min
<b>Sampling time</b>	1.6 h	6.5 h	32.7 h	2 days	5 days	8 days	16 days	32 days

**Event data file (approx.)**

<b>Data saving period</b>	25 ms	125 ms	0.5 s	1 s	10 s	30 s	1 min	2 min
<b>Sampling time</b>	NA	48 min	3.2 h	6.5 h	2 days	8 days	16 days	32 days

**Manual sample data:**

The measuring and computing data can be saved manually to the internal memory and CF card.

Trigger: Key operation, communication command or event action function

Data format:

Text

Max. number of data:

400 data (if exceeds 400 data, oldest data is overwritten)

**Report data (only for MATH option):**

Types: Hourly, daily, hourly + daily, daily + weekly, and daily + monthly

Data format:

Text

Drive: CF card

**Trigger function:**

Selectable from FREE or TRIG for event data saving.

Trigger mode:

Selectable from free, single or repeat trigger

Data length:

Selectable from 10, 20, 30 min, 1, 2, 3, 4, 6, 8, 12 hour, 1, 2, 3, 5, 7, 10, 14, 31 day

Pre trigger: Selectable from 0, 5, 25, 50, 75, 95, 100%

Trigger source:

Key operation, communication command or event action function

**Display hard copy:**

Trigger: Key operation, communication command or event action function

Data format:

png format

Drive/output:

CF card or communication interface

**Data file retrieving function:**

Data file in CF card or USB flash drive (only for USB option) can be retrieved and displayed.

Retrieved data file:

Display data file or event data file

**Saving and retrieving of configuration data:**

Configuration information can be saved and retrieved as text data.

Drive: CF card or USB flash drive (only for USB option)

**Alarm Function**

Number of alarm levels:

Up to four levels for each channel

Alarm types:

High and low limits, differential high and low limits, high and low rate-of-change limits and delay high and low

Alarm delay time:

1 to 3600 s\*

\* with the /AS1 option, it can be setup to 24 hours

Interval time of rate-of-change alarms:

The measurement interval times 1 to 32

Display:

The alarm status (type) is displayed in the digital value display area upon occurrence of an alarm. A common alarm indication is also displayed.

Alarm display color and display order can be changed by configured importance level and color.

Alarming behavior:

non-hold or hold-type can be selectable for common to all channels.

Hysteresis: On/off selectable (common to measurement channels, mathematical channels or external channels)

0.0 to 5.0% of display span (or scaling span)

Outputs:

Output: Internal switch or relay output (optional)

Number of internal switch:

30 points

Internal switch action:

AND/OR

Number of relay output points:

2, 4, 6, 12, 22 or 24 points (optional)

Relay action:

Energized/deenergized, hold/non-hold, AND/OR, alarm reflash selectable.

Alarm no logging function:

When alarm occurs, only internal switch or relay output is activated. There are no alarm display on screen and no record on alarm summary.

On/off selectable for each channel and alarm level.

**Memory:**

The times of alarm occurrences/recoveries, alarm types, etc. are stored in the memory.  
Up to 1000 latest alarm events are stored.

**Alarm annunciator function:**

Alarm display and relay output based on alarm sequence.  
Alarm sequence: 3 types (ISA-A-4, ISA-A, ISA-M)  
First out display function: Not available

**Event action function**

**General:** Particular action can be executed by particular event.

**Number of event action:**  
40 actions can be set

**Event list:**

Event	Level/Edge	Description
Remote	Level/Edge	Action by remote control signal
Relay	Level/Edge	Action by relay operation
Internal switch	Level/Edge	Action by internal switch operation
Alarm	Level/Edge	Action by any alarm
Timer	Edge	Action by timer time up
Match time	Edge	Action by time up of match time timer
USER key	Edge	Action by USER key operation
Event level switch	Level/Edge	Action by custom display, or communication command
Event edge switch	Edge	Action by custom display, FUNC display or communication command
Alarm OFF	Level/Edge	Action by alarm OFF
Internal switch OFF	Level/Edge	Action by internal switch OFF
Relay OFF	Level/Edge	Action by Relay OFF
Level switch OFF	Level/Edge	Action by level switch OFF

**Action list:**

Action	Level/Edge	Description
Memory start/stop	Level	Memory start and stop
Memory start	Edge	Memory start
Memory stop	Edge	Memory stop
Event trigger*	Edge	Event data sampling start
Alarm ACK	Edge	Alarm ACK
Math start/stop	Level	Computation start and stop
Math start	Edge	Computation start
Math stop	Edge	Computation stop
Math reset	Edge	Computation reset
Manual sample	Edge	Manual sample
Snapshot	Edge	Save display image to external media
Message input	Edge	Message writing
Waveform span rate change	Level	Change waveform span rate
Display data save	Edge	Save currently sampled display data to internal memory as a file
Event data save	Edge	Save currently sampled event data to internal memory as a file
Relative time timer reset	Edge	Reset relative time timer
Display group change	Edge	Change to specified display group
Time adjustment	Edge	Adjust internal clock to the nearest hour
Flag	Level	Normal: "0", Event: "1"
Setting file load*	Edge	Load setting file from CF card (up to 3 setting files).
Alarm display reset	Edge	Reset alarm display
Comment display	Edge	Display comment
Favorite display	Edge	Display registered favorite screen

\* Not available with /AS1 option.

**Security functions\***

**General:** Login function or key lock function can be set for each key operation or communication operation.

**Key lock function:**

On/off and password can be set for each operation key and FUNC operation. (Not available with /AS1 option)

**Login function:**

Using the login function described below, you can enter security settings on the instrument  
- User name  
- Password

**User level and number of users:**

**System administrator:** 5 users (all can be operated)  
**General user:** 30 users (With user restrictions, you can set restrictions on each operation key and FUNC display operation.)  
**User restrictions setting:** 10 kinds (for general users)

\* If the /AS1 option is installed, see the advanced security function (/AS1) specifications on page 15

**Clock**

**Clock:** With calendar function (year of grace)

**Clock accuracy:**

± 10 ppm, excluding a delay (of 1 second, maximum) caused each time the power is turned on.

**Time setting method:**

Key operation, communication command, event action function or SNTP client function

**Time adjustment method:**

**During memory sample:**  
Adjust 40 ms per second (No influence for measurement period)

**During memory stop:**  
Adjust at a time

**Time zone:**

**Time difference from GMT:**  
Settable from -1300 to 1300

**Date display format:**

Selectable from YYYY/MM/DD, MM/DD/YYYY, DD/MM/YYYY or DD.MM.YYYY

**DST function (summer/winter time):**

The time at which the daylight savings time adjustment is automatically calculated and configured.

**Communication Functions**

**Electrical specifications:**

Confirms to IEEE802.3 (DIX specification for Ethernet frames)

**Connection:**

Ethernet (10BASE-T)

**Protocols:** TCP, UDP, IP, ICMP, ARP, DHCP, HTTP, FTP, SMTP, SNTP, Modbus, DX private, EtherNet/IP

**E-mail inform function:**

E-mail is sent by events as below.

- Alarm occurring/alarm canceling
- Recover from power failure
- Memory end
- Storage medium error, FTP client function error
- Specified time period

- Report data time up (only for mathematical option)
  - When a user locked (only for /AS1 option)
- POP before SMTP and SMTP authentication (PLAIN and CRAM-MD5) is available.
- FTP client function:  
Data file auto-transfer from DX  
Transferred data file:  
Display data file, event data file, report data file and display image file, setting file (only for /AS1 option)
- FTP server function:  
File transfer from DX, file elimination (Not available with /AS1 option), directory operation and file list output are available by request from host computer.
- Web server function:  
Display image of DX and alarm information can be displayed on web browser.  
Display the data searching display and report data of DX on web browser.  
You can have a buzzer sound on the PC when an alarm occurs on the DX.
- SNTP client function:  
The time on DX can be synchronized to the time of a SNTP server.
- SNTP server function:  
The DX can operate as a SNTP server.
- DHCP client function:  
Network address configuration can be obtained automatically from DHCP server.  
Obtained information:  
IP address, subnet mask, default gateway and DNS information
- Modbus client function:  
Reading or writing of measurement data on other instruments are available by Modbus protocol.  
Mathematical option or external input option is required to read the data from other instruments.
- Modbus server function:  
Output of measurement data from DX is available by Modbus protocol.  
Control operation such as message or batch name writing is available.  
Access control from Modbus client to register is available by IP filtering function.
- Setting/measurement server function:  
Operation, setting or output of measurement data are available by DX private protocol.
- Maintenance/test server function:  
Output connection information or network information of the Ethernet communication.
- Instrument information server function:  
Output instrument information such as serial number or model name of DX.
- EtherNet/IP server function:  
- Reading of measurement data or mathematical channel data  
- Reading or writing of external channel data  
- Reading or writing of communication input channel

**Batch function**

- General: Data display and data management with batch name, text field function and batch comment function are available.

- Batch name:  
Batch name can be used as file name of display data, event data and report data.  
Batch name format:  
Batch number (max. 32 characters) + lot number (max. 8 characters)  
Use/not use selectable for lot number, on/off selectable for auto increment function

- Text field function:  
Field number:  
1 to 24  
Field title:  
Max. 20 characters  
Field text:  
Max. 30 characters

- Batch comment function:  
Batch comment is added to display data and event data.  
Batch comment information:  
3 comments (max. 50 characters) are available.

**Power Supply**

- Rated power supply:  
100 to 240 VAC (automatic switching)  
Allowable power supply voltage range:  
90 to 132 or 180 to 264 VAC  
Rated power supply frequency:  
50/60 Hz (automatic switching)  
Power consumption:

Supply voltage	LCD off	Normal	Max.
100 VAC	28 VA	42 VA	74 VA
240 VAC	38 VA	54 VA	100 VA

- Allowable interruption time:  
Less than 1 cycle of power supply frequency

**Other Specifications**

- Memory backup :  
A built-in lithium battery backs up the setup parameters (battery life : approximately 10 years at room temperature).
- Insulation resistance:  
Each terminal to ground terminal:  
20 MΩ or greater (at 500 VDC)
- Dielectric strength:  
Power supply to ground terminal:  
2300 VAC (50/60 Hz), 1 min  
Contact output terminal to ground terminal:  
1600 VAC (50/60 Hz), 1 min  
Measuring input terminal to ground terminal:  
1500 VAC (50/60 Hz), 1 min  
Between measuring input terminals:  
1000 VAC (50/60 Hz), 1 min (except for b-terminal of RTD input of DX2010, DX2020, DX2030, DX2040 and DX2048)  
Between remote control terminal to ground terminal:  
1000 VDC, 1 min

**Safety and EMC Standards**

- CSA: CSA22.2 No61010-1  
Installation category II<sup>1</sup>, pollution degree 2<sup>2</sup>
- UL: UL61010-1 (CSA NRTL/C)
- CE:  
EMC directive:  
EN61326-1 compliant, Class A Table 2  
EN61000-3-2 compliant  
EN61000-3-3 compliant  
EN55011 compliant, Class A Group 1

Low voltage directive:

EN61010-1 compliant, measurement category II<sup>3</sup>, pollution degree 2<sup>2</sup>

C-Tick: EN55011 compliant, Class A Group 1

\*1: Installation Category (Overvoltage Category) II  
Describes a number which defines a transient overvoltage condition. It implies the regulation for impulse withstand voltage. "II" applies to electrical equipment which is supplied from fixed installations like distribution boards.

\*2: Pollution Degree  
Describes the degree to which a solid, liquid, or gas which deteriorates dielectric strength or surface resistivity is adhering. "2" applies to normal indoor atmosphere. Normally, only non-conductive pollution occurs.

\*3: Measurement Category II  
Applies to measuring circuits connected to low voltage installation, and electrical instruments supplied with power from fixed equipment such as electric switchboards.

### Standard Performance

Measuring and Recording Accuracy:

The following specifications apply to operation of the recorder under standard operation conditions.

Temperature:

23 ± 2 °C

Humidity:

55% ± 10% RH

Power supply voltage:

90 to 132 or 180 to 250 VAC

Power supply frequency:

50/60 Hz ± 1%

Warm-up time:

At least 30 min.

Other ambient conditions such as vibration should not adversely affect recorder operation.

### Normal Operating Conditions

Power voltage:

90 to 132 or 180 to 250 VAC

Power supply frequency:

50 Hz ±2%, 60 Hz ±2%

Ambient temperature:

0 to 50 °C

Ambient humidity:

20% to 80% RH (at 5 to 40 °C)

Vibration: 10 to 60 Hz, 0.2 m/s<sup>2</sup> or less

Shock: Not acceptable

Magnetic field:

400 AT/m or less (DC and 50/60 Hz)

Noise:

Normal mode (50/60 Hz):

DCV: The peak value including the signal must be less than 1.2 times the measuring range.

TC: The peak value including the signal must be less than 1.2 times the measuring thermal electromotive force.

RTD: 50 mV or less

Common mode noise voltage (50/60 Hz):

250 Vrms AC or less for all ranges

Maximum noise voltage between channels (50/60 Hz):

250 Vrms AC or less

Mounting position:

Can be inclined up to 30 deg backward.

Mounting at an angle away from the perpendicular is not acceptable.

Warm-up time:

At least 30 min after power on

Installation location:

In-room

Altitude: Less than 2000 m



Input	Range	Measurement accuracy (digital display)		Max. resolution of digital display
		A/D integration time: 16.7ms or more	A/D integration time: 1.67ms (fast sampling mode)	
DCV	20 mV	±(0.05% of rdg + 12 digits)	±(0.1% of rdg + 40 digits)	1 μV
	60 mV			10 μV
	200 mV	±(0.05% of rdg + 3 digits)	±(0.1% of rdg + 15 digits)	10 μV
	2 V	±(0.05% of rdg + 12 digits)	±(0.1% of rdg + 40 digits)	100 μV
	6 V			1 mV
	1-5 V	±(0.05% of rdg + 3 digits)	±(0.1% of rdg + 15 digits)	1 mV
	20 V			1 mV
	50 V			10 mV
TC (Excluding RJC accuracy)	R	±(0.15% of rdg + 1°C) However, R, S:	±(0.2% of rdg + 4°C) However, R, S:	0.1°C
	S	±3.7°C at 0 to 100°C ±1.5°C at 100 to 300°C B:	±10°C at 0 to 100°C ±5°C at 100 to 300°C B:	
	B	±2°C at 400 to 600°C Accuracy at less than 400°C is not guaranteed.	±7°C at 400 to 600°C Accuracy at less than 400°C is not guaranteed.	
	K	±(0.15% of rdg + 0.7°C) However, ±(0.15% of rdg + 1°C) at -200 to -100°C	±(0.2% of rdg + 3.5°C) However, ±(0.15% of rdg + 6°C) at -200 to -100°C	
	E			
	J	±(0.15% of rdg + 0.5°C) However,	±(0.2% of rdg + 2.5°C) However,	
	T	±(0.15% of rdg + 0.7°C) at -200 to -100°C	±(0.2% of rdg + 5°C) at -200 to -100°C	
	L			
	U			
	N	±(0.15% of rdg + 0.7°C) However, ±(0.35% of rdg + 0.7°C) at -200 to 0°C Accuracy at less than -200°C is not guaranteed.	±(0.3% of rdg + 3.5°C) However, ±(0.7% of rdg + 3.5°C) at -200 to 0°C Accuracy at less than -200°C is not guaranteed.	
W	±(0.15% of rdg + 1°C)	±(0.3% of rdg + 7°C)		
WRe	±(0.2% of rdg + 2.5°C) However, ±4°C at 0 to 200°C	±(0.3% of rdg + 10°C) However, ±18°C at 0 to 200°C		
RTD	Pt100			
	JPt100	±(0.15% of rdg + 0.3°C)	±(0.3% of rdg + 1.5°C)	

Measurement accuracy in case of scaling (digits):  
= measurement accuracy (digits) x scaling span (digits)/measurement span (digits) + 2 digits  
Decimals are rounded off to the next highest number.

Reference junction compensation:  
INT (internal)/EXT (external) selectable  
(common for all channels)

Reference junction compensation accuracy:  
Types R, S, B, W, WRe: ± 1 °C  
Types K, J, E, T, N, L, U: ± 0.5 °C  
(Above 0 °C, input terminal temperature is balanced)

Maximum allowable input voltage:  
± 60 VDC (continuous) for all input ranges

Input resistance:  
Approx. 10 MΩ or more for DCV ranges of 200 mVDC or less and TC  
Approx. 1 MΩ for more than 2 VDC ranges

Input source resistance:  
DCV, TC: 2 kΩ or less  
RTD: 10 Ω or less per wire (The resistance of all three wires must be equal.)

Input bias current:  
10 nA or less (approx. 100nA for TC range with burnout function)

Maximum common mode noise voltage:  
250 Vrms AC (50/60 Hz)

Maximum noise voltage between channels:  
250 Vrms AC (50/60 Hz)

Interference between channels:  
120 dB (when the input source resistance is 500 Ω and the inputs to other channels are 60 V)

Common mode rejection ratio:  
A/D integration time 20 ms:  
More than 120 dB (50 Hz ± 0.1%, 500 Ω imbalance between the minus terminal and ground)

A/D integration time 16.7 ms:  
More than 120 dB (60 Hz ± 0.1%, 500 Ω imbalance between the minus terminal and ground)

A/D integration time 1.67 ms:  
More than 80 dB (50/60 Hz ± 0.1%, 500 Ω imbalance between the minus terminal and ground)

Normal mode rejection ratio:  
A/D integration time 20 ms:  
More than 40 dB (50 Hz ± 0.1%)

A/D integration time 16.7 ms:  
More than 40 dB (60 Hz ± 0.1%)

A/D integration time 1.67 ms:  
50/60Hz is not rejected.

## Effects of Operating Conditions

Ambient temperature: (Only for 16.7 ms A/D integration time or more)

With temperature variation of 10 °C

DCV, TC:  $\pm (0.1\% \text{ of rdg} + 0.05\% \text{ of range})$  or less

Excluding the error of reference junction compensation

RTD:  $\pm (0.1\% \text{ of rdg} + 2 \text{ digits})$  or less

Power supply:

With variation within 90 to 132 V and 180 to 250 VAC (50/60 Hz):

Within measurement accuracy

With variation of  $\pm 2$  Hz from rated power frequency (at 100 VAC):

Within measurement accuracy

Magnetic field:

AC (50/60 Hz) and DC 400 A/m fields:

$\pm (0.1\% \text{ of rdg} + 10 \text{ digits})$  or less

Input source resistance:

(1) DCV range (with variation of +1 k $\Omega$ )

200 mVDC range or less:

$\pm 10 \mu\text{V}$  or less

2 VDC range or greater:

$\pm 0.15\% \text{ of rdg}$  or less

(2) TC range (with variation of +1 k $\Omega$ )

$\pm 10 \mu\text{V}$

(3) RTD range (Pt100)

With variation of 10  $\Omega$  per wire (resistance of all three wires must be equal):

$\pm (0.1\% \text{ of rdg} + 1 \text{ digit})$  or less

With maximum difference of 40 m $\Omega$  between wires:

approx.  $\pm 0.1$  °C

## Transport and Storage Conditions

The following specifies the environmental conditions required during transportation from shipment to the start of service and during storage as well as during transportation and storage if this instrument is temporarily taken out of service.

No malfunction will occur under these conditions without serious damage, which is absolutely impossible to repair; however, calibration may be necessary to recover normal operation performance.

Ambient temperature:

-25 °C to 60 °C

Humidity: 5% to 95% RH (No condensation is allowed.)

Vibration: 10 to 60 Hz, 4.9 m/s<sup>2</sup> maximum

Shock: 392 m/s<sup>2</sup> maximum (while being packed)

## SPECIFICATIONS OF OPTIONAL FUNCTIONS

### Alarm Output Relays (/A1, /A2, /A3, /A4, /A5)

An alarm signal is output from the rear panel as a relay contact signal.

Number or output:

Select from 2, 4, 6, 12 and 24 points

Relay contact rating:

250 VDC/0.1 A (for resistance load), 250

VAC (50/60 Hz)/3 A

Terminal configuration:

SPDT (NO-C-NC). Energized-at-alarm/deenergized-at-alarm,

AND/OR, and hold/non-hold actions are selectable.

### Serial Communication Interface (/C2, /C3)

Connection:

EIA RS-232 (/C2) or RS-422A/485 (/C3)

Protocols: DX private protocol, Modbus(master/slave) protocol, DX private bar code protocol (only for /AS 1 option)

Synchronization method:

Start-stop asynchronous transmission

Connection method (RS-422A/485):

4-wire half-duplex multi-drop connection

(1 : N, N = 1 to 31)

Transmission speed:

1200, 2400, 4800, 9600, 19200 or 38400 bps

Data length:

7 or 8 bits

Stop bit: 1 bit

Parity: Odd, even, or none

Communication distance (RS-422A/485):

Up to 1.2 km

Communication mode:

ASCII for input/output for control and setting

ASCII or binary for output of measured data

Setting/measurement server function:

Operation, setting or output of measurement data are available by DX private protocol.

Modbus communication:

Reading or writing of measurement data on other instruments are available by Modbus protocol.

Mathematical function option or external input option is needed to read measurement data from other instruments.

Control operation such as message or batch name writing is available (Modbus slave function).

Operation mode:

RTU MASTER or RTU SLAVE

Modbus master command number:

1 to 16

### VGA Video Output (/D5)

Resolution: 640 x 480 pixels (VGA)

Connector: 15 pins D-SUB (DB15HD)

### Fail/Status Output (/F1)

The relay contact output on the rear panel indicates the occurrence of CPU failure or selected status.

You can select the contents output to the two relay output signals.

FAIL output relay:

The relay contact output on the rear panel indicates the occurrence of CPU failure.

Relay operation: CPU normal: Energized, CPU failure: Deenergized

Status output relay:

The relay contact output on the rear panel indicates the occurrence of selected status

Relay operation: Status detection:

Energized

Status	Description
Memory status	Relay is energized when internal memory or external storage media is in the following conditions: Abnormality in the internal memory When automatic saving of settings to the external storage media is ON <ul style="list-style-type: none"> <li>• When the remaining space on the external storage medium reaches 10%.</li> <li>• When an abnormality occurs with the external storage medium, and auto save fails</li> <li>• When the external storage medium is not inserted, operation is same as when automatic saving of settings to the external storage media is Off</li> </ul> When automatic saving of settings to the external storage media is Off <ul style="list-style-type: none"> <li>• When the remaining space on the internal memory reaches 10%</li> <li>• When the number of data file which is not saved to external storage media exceeds 390</li> </ul> *Not including USB memory connected to the instrument.
Measurement Failure	Relay energized upon A/D converter abnormality or burnout detection
Comm. failure	Relay energized when communication error occurs in the Modbus master
Memory stop	Relay energized upon memory stop
Alarm	Relay energized upon any alarm occurs

- Memory start and stop output
  - Outputting the user locked condition
  - Outputting the presence of login users
- These three are only available with the /AS1 option.

Relay contact rating:  
250 VDC/0.1 A (for resistance load), 250 VAC (50/60 Hz)/3A

**Fail & Alarm Output Relays 22 points (/F2)**

Combination of "Fail/Memory end output function" and "Alarm output relays 22 points".

**Clamped Input Terminal (/H2)**

Clamped input terminal (detachable type) is used for input terminal.

Available wire size:  
0.08 to 1.5 mm<sup>2</sup> (AWG28 to 16)

**Desk Top Type (/H5 [ ], /H5\*)**

Provides carrying handle and power cord.  
\* In case that /P1 is specified together, /H5 must be specified. Power terminal will be screw type and power code will not be provided.

**Mathematical Functions (/M1)**

Used for calculating data, displaying trends and digital values, and recording calculated data assigned to channels.

Channel assignable to calculated data:  
DX2004, DX2008:  
Up to 12 channels (101 to 112)  
DX2010, DX2020, DX2030, DX2040, DX2048:  
Up to 60 channels (101 to 160)

Max. character length of expression:  
120 characters

Operation:  
General arithmetic operations:  
Four arithmetic operations, square root, absolute, common logarithm, natural logarithm, exponential, power, relational operations (>, ≥, <, ≤, =, ≠), logic operations (AND, OR, NOT, XOR)

Statistical operations:

TLOG (Average, maximum, minimum, summation and P-P value of time series data)  
CLOG (Average, maximum, minimum, summation and P-P value of channel series data)

Special operations:

PRE (Previous data)  
HOLD(a):b (Hold data of "b" in case of "a" is not "0")  
RESET(a):b (Reset data of "b" and restart in case of "a" is not "0")  
CARRY(a):b (If "b" exceeds "a", "b-a" becomes computation results)

Conditional operation:

[a?b:c] (Execute "b" in case of "a" is not "0", or execute "c" in case of "a" is "0")

Constant: Up to 60 constants (K01 to K60)

Digital data input via communication:  
Up to 60 data (C01 to C60)

External input:  
Up to 240 data (201 to 440) (only for external input option)

Remote status input:

Remote input status (0/1) can be used in mathematical expression

Up to 8 inputs (D01 to D08)

Pulse input: Up to 8 pulse count input (P01 to P08, Q01 to Q08) (only for pulse input option)

Status input:

Internal switch status (S01 to S30), relay status (I01 to I36), memory sampling status (M01 to M12) and flag status (F01 to F08) can be used in mathematical expression

**Cu10, Cu25 RTD Input /3 leg isolated RTD Input (/N1)**

This option allows Cu10 and Cu25 inputs to be added to the standard input types.

A, B, b legs are of isolated input type for DX2010, DX2020, DX2030, DX2040 and DX2048.

Input type Measuring range:

The following specifications apply to operation of the recorder under standard operation conditions.

Temperature:  
23 ± 2 °C

Humidity:  
55% ± 10% RH

Report functions:

Number of report channels:  
DX2004, DX2008: up to 12 channels  
DX2010, DX2020, DX2030, DX2040:  
up to 60 channels

Report type:

Hourly, daily, hourly + daily, daily +weekly and daily + monthly

Operation:

Max. 4 types are selectable from average, maximum, minimum, instantaneous and summation

Data format:

TEXT

Excel spread sheet template function:

reports can be automatically created in XML spread sheet format according to a predefined spread sheet template

Long term rolling average:  
 Computation interval:  
     1, 2, 3, 4, 5, 6, 10, 12, 15, 20, 30 sec., 1, 2,  
     3, 4, 5, 6, 10, 12, 15, 20, 30, 60 min  
 Number of sampling:  
     1 to 1500  
 Power supply voltage:  
     90 to 132 or 180 to 250 VAC  
 Power supply frequency:  
     50/60 Hz ± 1%  
 Warm-up time:  
     At least 30 min.  
 Other ambient conditions such as vibration should not adversely affect recorder operation.

Input	Type	Measurement range	Accuracy guarantee d range	Measurement accuracy		Max. resolution of digital display
				A/D integration time: 16.7 ms or more	A/D integration time: 1.67ms (Fast sampling mode)	
RTD *1	Cu10 (GE)	-200 to 300°C	-70 to 170°C	±(0.4% of rdg + 1.0°C)	±(0.8% of rdg + 5.0°C) RTD	0.1°C
	Cu10 (L&N)		-75 to 150°C			
	Cu10 (WEED)		-200 to 260°C			
	Cu10 (BAILEY)					
	Cu10:α =0.00392 at 20°C					
	Cu10:α =0.00393 at 20°C					
	Cu25:α =0.00425 at 0°C		-200 to 300°C	±(0.3% of rdg + 0.8°C)	±(0.5% of rdg + 2.0°C)	

\*1 Measuring current: i = 1mA

Input source resistance:  
     1 Ω or less per wire (The resistance of all three wires must be equal.)  
 Ambient temperature: (Only for 16.7 ms A/D integration time or more)  
     With temperature variation of 10 °C  
     ± (0.2% of rdg + 2 digits) or less  
 Input source resistance:  
     With variation of 1 Ω per wire (resistance of all three wires must be equal):  
     ± (0.1% of rdg + 1 digit) or less  
     With maximum difference of 40 mΩ between wires:  
     approx. ± 1 °C

**3 legs Isolated RTD Input (/N2)**

A, B, b legs are of isolated input type.  
 \* Can be specified only for DX2010, DX2020, DX2030, DX2040 and DX2048.  
 A, B, b legs of DX2004 and DX2008 are isolated as standard.

**Extended Input Types (/N3)**

This option allows extra inputs types to be added to the standard input types.  
 Input type Measuring range:  
 The following specifications apply to operation of the recorder under standard operation conditions.  
 Temperature:  
     23 ± 2 °C  
 Humidity: 55% ± 10% RH  
 Power supply voltage:  
     90 to 132 or 180 to 250 VAC  
 Power supply frequency:  
     50/60 Hz ± 1%  
 Warm-up time:  
     At least 30 min.  
 Other ambient conditions such as vibration should not adversely affect recorder operation.

Input	Type	Measurement range	Measurement accuracy		Max. resolution of digital display
			A/D integration time: 16.7 ms or more	A/D integration time: 1.67ms (Fast sampling mode)	
TC	Kp vs Au7Fe	0.0 to 300.0K	Within ±4.5K at 0 to 20K Within ±2.5K at 20 to 300K	Within ±13.5K at 0 to 20K Within ±7.5K at 20 to 300K	0.1 K
	PLATINEL	0.0 to 1400.0°C	±(0.25% of rdg+2.3°C)	±(0.25% of rdg+8.0°C)	0.1°C
	PR40-20	0.0 to 1900.0°C	Accuracy is not guaranteed at 0 to 450°C ±(0.9% of rdg+3.2°C) at 450 to 750°C ±(0.9% of rdg+1.3°C) at 750 to 1100°C ±(0.9% of rdg+0.4°C) at 1100 to 1900°C	Accuracy is not guaranteed at 0 to 450°C ±(0.9% of rdg+15.0°C) at 450 to 750°C ±(0.9% of rdg+6.0°C) at 750 to 1100°C ±(0.9% of rdg+3.0°C) at 1100 to 1900°C	
	NiNiMo	0.0 to 1310.0°C	±(0.25% of rdg+0.7°C)	±(0.5% of rdg+3.5°C)	
	W/WRe	0.0 to 2400.0°C	±15.0°C at 0 to 400°C ±(0.2% of rdg+2.0°C) at 400 to 2400°C	±30.0°C at 0 to 400°C ±(0.4% of rdg+4.0°C) at 400 to 2400°C	
	TypeN(AWG14)	0.0 to 1300.0°C	±(0.2% of rdg+1.3°C)	±(0.5% of rdg+7.0°C)	
	XK GOST	-200.0 to 600.0°C	±(0.25% of rdg +0.8°C) ±(0.25% of rdg +1.0°C) at -200 to -100°C	±(0.5% of rdg +4.0°C) ±(0.5% of rdg +5.0°C) at -200 to -100°C	
RTD *1	Pt50	-200.0 to 550.0°C	±(0.3% of rdg+0.6°C)	±(0.6% of rdg+3.0°C)	0.1 K
	Ni100(SAMA)	-200.0 to 250.0°C	±(0.15% of rdg+0.4°C)	±(0.3% of rdg+2.0°C)	
	Ni100(DIN)	-60.0 to 180.0°C	±(0.15% of rdg+0.4°C)	±(0.3% of rdg+2.0°C)	
	Ni120	-70.0 to 200.0°C	±(0.15% of rdg+0.4°C)	±(0.3% of rdg+2.0°C)	0.1°C
	J263*B	0.0 to 300.0 K	Within ±3.0K at 0 to 40K Within ±1.0K at 40 to 300K	Within ±9.0K at 0 to 40K Within ±3.0K at 40 to 300K	
	Cu53	-200.0~550.0°C	±(0.3% of rdg +0.8°C)	±(0.3% of rdg+4.0°C)	
	Cu100	-50.0 to 150.0°C	±(0.2% of rdg+1.0°C)	±(0.4% of rdg+5.0°C)	
	Pt25	-200.0 to 550.0°C	±(0.15% of rdg +0.6°C)	±(0.3% of rdg +3.0°C)	
	Pt46 GOST	-200.0 to 550.0°C	±(0.3% of rdg +0.8°C)	±(0.6% of rdg +4.0°C)	
	Pt100 GOST	-200.0 to 600.0°C	±(0.15% of rdg +0.3°C)	±(0.3% of rdg +1.5°C)	
	Cu10 GOST	-200.0 to 200.0°C	±(1.5% of rdg+3.0°C)	±(3.0% of rdg +15.0°C)	
	Cu50 GOST	-200.0 to 200.0°C	±(0.4% of rdg +0.5°C)	±(0.8% of rdg +2.5°C)	
	Cu100 GOST	-200.0 to 200.0°C	±(0.15% of rdg +0.3°C)	±(0.3% of rdg +1.5°C)	
Pt200(WEED)	-100.0 to 450.0°C	±(0.3% of rdg +0.6°C)	±(0.6% of rdg +3.0°C)		

\*1 Measuring current: i = 1mA

Input source resistance:

- TC: 2 kΩ or less
- RTD: 1 Ω or less per wire (The resistance of all three wires must be equal.)

Ambient temperature: (Only for 16.7 ms A/D integration time or more)

- With temperature variation of 10 °C
  - TC: ± (0.1% of rdg + 0.05% of range) or less Excluding the error of reference junction compensation.
  - RTD: ± (0.2% of rdg + 2 digits) or less

Input source resistance:

- (1) TC range (with variation of + 1 kΩ) ±10 μV

(2) RTD range

- With variation of 1 Ω per wire (resistance of all three wires must be equal):
  - ± (0.1% of rdg + 1 digit) or less
- With maximum difference of 100 mΩ between wires: approx. ± 1 °C

**24 VDC/AC Power Supply (/P1)**

Rated power supply: 24 VDC or 24 VAC (50/60Hz)  
Allowable power supply voltage range: 21.6 to 26.4 VDC/AC

Insulation resistance:

Power supply to ground terminal: 20 MΩ or greater (at 500 VDC)

Dielectric strength:

Power supply to ground terminal: 500 VAC (50/60 Hz), 1 min

Max. power consumption:

Supply voltage	LCD off	Normal	Max.
24 VDC	12 VA	20 VA	45 VA
24 VAC (50/60 Hz)	20 VA	34 VA	70 VA

**Remote Control (/R1)**

This option allows eight functions to be controlled remotely by a contact input.  
Please refer the part of "Event action function" for functions to be controlled.

**24 VDC transmitter power supply (/TPS4, /TPS8)**

- Output voltage:
  - 22.8 to 25.2 VDC (rated load current)
- Rated output current:
  - 4 to 20 mADC
- Max. output current:
  - 25 mADC (current to guard operation against overcurrent: approx. 68 mADC)
- Allowable conductor resistance:
  - $RL \leq (17.8 - \text{transmitter minimum operation voltage})/0.02 \text{ A}$  (not include drop voltage with load shunt resistance)
- Max. length of wiring:
  - 2 km (CEV cable)
- Insulation resistance:
  - output terminal to grand terminal more than 20 M $\Omega$  (500 VDC)
- Dielectric strength:
  - Output terminal to grand terminal:
    - 500 VAC (50/60 Hz, I = 10 mA), 1 min
  - Between output terminal:
    - 500 VAC (50/60 Hz, I = 10 mA), 1 min

**Easy text entry (/KB1, /KB2)**

- Normal operating conditions:
  - Ambient temperature for usage:
    - 0 to 40 °C
  - Ambient humidity for usage:
    - 20 to 80% RH (When 5 to 40 °C, no condensation)
  - Ambient temperature for storage:
    - 10 to 60 °C
- Power supply:
  - AA dry battery  $\times$  2
- Weight:
  - Approx. 60 g (excluding dry battery)
- Dimensions:
  - 170 (W)  $\times$  50 (H)  $\times$  23.7 (D) mm
- Number of units that can be controlled:
  - Max. 32 units by ID setting
- Communication distance:
  - Max. 8 m (depending on battery strength and usage area)
- Orientation specifications:
  - Depends on battery strength & usage area

**USB interface (/USB1)**

- USB interface specification:
  - Based on Rev1.1, host function
- Number of ports:
  - 2 ports (Front and rear panel)
- Power supply:
  - 5V, 500mA (for each port)\*1
- Available USB devices:
  - Keyboard: 104/89 keyboard (US) based on USB HID Class Ver.1.1
- External medium:
  - USB flash drive (some of USB flash drives may not be supported by DXAdvanced)
- Barcode reader:
  - Interface based on USB HID Class Ver.1.1 and supports standard US keyboard
- \*1:
  - For low powered devices (bus power < 100 mA):
    - 5V  $\pm$  5%
  - For high powered devices (bus power < 500 mA):
    - 5V  $\pm$  10%
- Devices which need more than 500 mA total bus power for 2 ports can not be connected at the same time.

**Pulse input (/PM1)**

- Pulse input option includes mathematical functions option (/M1) and remote control option (/R1).
- Number of inputs:
  - 3 points (8 points are available in case of using remote inputs)
- Input format:
  - Photocoupler isolation (shared common)
  - Isolated power supply for input terminal (approx. 5 V)
- Input type:
  - Non-voltage contact:
    - Close: 200  $\Omega$  or less, Open: 100 k $\Omega$  or more
  - Open collector:
    - ON: 0.5 V or less (30 mADC), Leakage current of OFF: 0.25 mA or less
- Counting:
  - Counts rising edges of pulses
- Allowable input voltage:
  - 30 VDC
- Max. sampling pulse period:
  - Max. 100 Hz
- Minimum pulse length:
  - 5 ms
- Pulse detection period:
  - Approx. 3.9 ms (256Hz)
- Pulse measuring accuracy:
  - $\pm$ 1 pulse (for instantaneous mode)
- Pulse count period:
  - Counts the number of pulse per measurement period (P01 to P08) or per second (Q01 to Q08).

**Calibration correction function (/CC1)**

- Corrects the measurement value of each channel using segment linearizer approximation.
- Number of segment points:
  - 2 to 16
- Calibration correction control function:
  - You can specify how calibration correction settings are periodically performed

**External input function (/MC1)**

- Digital input channels via communication or Modbus master function are extended to input data from other instruments\*.
- Number of external input channels:
  - Up to 240 channels (channel number: 201 to 440)
- \* Only for DX2010, DX2020, DX2030, DX2040 and DX2048
- \* Fast sampling mode is not available with external input function option.

**Multi-batch function (/BT2)**

This option allows to start/stop the independent data file for each batch and creating independent data file\*.

\* Only for DX2010, DX2020, DX2030, DX2040 and DX2048.

\* Fast sampling mode is not available when the multi-batch function is being used.

Number of batches:  
2 to 12

Independent operation for each batch:  
Memory start/stop, math reset, writing message

Common operation for all batches:  
Math start/stop, report start/stop, manual sample, setting data save/load

Measurement interval:  
Only normal mode (fast sampling mode is not available), 1 s fastest (common for all batches)

Data type:  
Display data file or event data file only.  
Trigger mode is not available for event data file.

Data saving period:  
Common for all batches

Data file:  
Each display/event data file is created for each batch

Number of group:  
12 groups maximum for each batch  
10 channels maximum for each group

Number of timer and match time timer:  
12 timers maximum

Independent settings for each batch:  
Group setting, trip line setting, file header setting, data file name setting, text field setting, batch number setting, lot number setting

**PROFIBUS-DP Communication Interface (/CP1)**

PROFIBUS-DP master device can access to internal data below.

Reading measurement channel data  
Reading mathematical channel data  
Writing communication input channel data (32 channels maximum)

Note: When the computation function option is installed, PROFIBUS-DP always uses communication input channels C01-C32, therefore it is not possible to read/write to the same communication input using other communication functions.

Data mapping:

Buffer	Description	Max. size
Input	Measurement data are mapped from top of buffer Math channel data are mapped in rest of buffer	128 byte
Output	Communication input channel data are mapped (32 channels max.)	128 byte

Node address setting range:  
0 to 125

Interface:  
PROFIBUS-DP-V0 Slave

Transmission medium:  
2 wires exclusive cable (2 wires for signal)

Transmission speed/distance:  
9.6 kbps/1200m to 12Mbps/100m

Terminator:  
Not included (external terminator is needed)

**Advanced security function (/AS1)**

Security and electronic record/signature functions have been added that are compliant with the USA's FDA title 21 CFR Part 11.

Data anti-tamper function:  
Settings and measured data are saved as encrypted binary files.

Data type:  
Only for display or event  
Trigger mode is not possible with event data.

Login function:  
Using the login function described below, you can enter security settings on the instrument  
- User name  
- Password  
- User ID (depend on setting)

User level and number of users:  
System administrator: 5 users (all can be operated)  
General user: 90 users (With user restrictions, you can set restrictions on performing operations and sign authority .)  
User restrictions setting: 10 kinds (for general users)

Password expiration time:  
select form Off, 1month, 3 month, 6month

Password control function:  
Logins are verified by a Kerberos authentication server\* (only user name and password)  
Encryption method:

AES128-CTS-HMAC-SHA1-96  
AES256-CTS-HMAC-SHA1-96  
ARCFOUR-HMAC-MD5

Pre-Auth function: use  
\* The function has confirmed compatibility with Windows Server2003 SP2/Windows Server2008 SP2 Active Directory

Signature function:  
After checking data that has finished being recorded, you can add three levels of electronic signature, select a pass/fail, and enter comments (32 characters maximum)

Audit trail function:  
The operation log, the settings change log and the settings file when the change was made are saved.

Individual alarm ACK function:  
Alarm display and relay output can be cancelled on individual alarms  
ACK can be performed in the overview display

Extended alarm delay time:  
Alarm delay times of up to 24 hours can be set

## APPLICATION SOFTWARE

### DAQSTANDARD

#### Operating environment

- OS: Windows 2000 SP4  
 Windows XP (Home Edition SP2, SP3, Professional SP2, SP3)\*  
 \* Except for Professional x64 Edition  
 Windows Vista (Home Premium SP1, SP2, Business SP1, SP2)\*  
 \* Except for 64-bits editions  
 Windows 7 (Home Premium 32-bit and 64-bit editions, Professional 32-bit and 64-bit editions)

#### Processor and main memory

- 2000/XP: Intel Pentium III, 600 MHz or faster x64 or x86, 128MB or more  
 Vista: Intel Pentium 4, 3GHz or faster x64 or x86, 2GB or more  
 7: 32-bit edition Intel Pentium 4, 3GHz or faster x64 or x86, 2GB or more  
 64-bit edition Intel x64 processor that is equivalent to Intel Pentium 4, 3 GHz or faster, 2GB or more

Hard disk: 100MB or more of free space

Display: A video card that is recommended for the OS and a display that is supported by the OS, has a resolution of 1024 × 768 or higher, and that can show 65,536 colors (16-bit, high color) or more.

#### Configuration software:

- Setting mode:  
 Configuration of setting mode and basic setting mode  
 Configuration via communication:  
 Configuration of setting mode and basic setting mode without communication configuration (ex. IP address)

#### Data viewer software:

Number of display channels:  
 32 channels per group, 50 groups maximum

#### Viewer function

Waveform display, digital display, circular display, list display, report display, operation log display etc.

#### Signature function:

Three levels of electronic signature, select a pass/fail, and comments (32 characters maximum) can be inserted on the currently displayed data file  
 \* Applying electronic signatures to data files created using the password management function requires a network that can connect with the Kerberos authentication server set on the main unit.

#### Data conversion:

File conversion to ASCII, Lotus 1-2-3 or MS-Excel format

### DAQStudio (optional)

#### Custom display builder software

#### Operating environment

The following operating environment will be applied to products that are shipped from late August 2010.

- OS: Windows XP (Home Edition SP3, Professional SP3)\*  
 \* Except for Professional x64 Edition  
 Windows Vista (Home Premium SP1, SP2, Business SP1, SP2)\*  
 \* Except for 64-bits editions  
 Windows 7 (Home Premium 32-bit and 64-bit editions, Professional 32-bit and 64-bit editions)

#### Processor

- XP: Intel Pentium 4, 1.6 GHz or faster x64 or x86 processor  
 Vista: Intel Pentium 4, 3GHz or faster x64 or x86 processor  
 7: 32-bit edition Intel Pentium 4, 3GHz or faster x64 or x86 processor  
 64-bit edition Intel x64 processor that is equivalent to Intel Pentium 4, 3 GHz or faster

Memory: 512 MB or more (Windows XP)  
 2 GB or more (Windows Vista/7)

Hard disk: 100MB or more of free space

Display: A video card that is recommended for the OS and a display that is supported by the OS, has a resolution of 1024 × 68 or higher, and that can show 65,536 colors (16-bit, high color) or more.

#### General functions

- (1) Send and receive the parts layout data of the custom display (via Ethernet or CF card).
- (2) Display the custom screens, create new custom display and edit.
- (3) Save and load the file of configured or edited custom display data.



## MODEL AND SUFFIX CODES

Model code	Suffix code	Optional code	Description
DX2004			4ch, 125ms (Fast sampling mode: 25ms)
DX2008			8ch, 125ms (Fast sampling mode: 25ms)
DX2010			10ch, 1s (Fast sampling mode: 125ms)
DX2020			20ch, 1s (Fast sampling mode: 125ms)
DX2030			30ch, 1s (Fast sampling mode: 125ms)
DX2040			40ch, 1s (Fast sampling mode: 125ms)
DX2048			48ch, 1s (Fast sampling mode: 125ms)
Internal memory	-3		400MB
External media	-4		CF card (with media)
Display language	-2		English/German/French, degF, DST(summer/winter time)
Options		/A1	Alarm output 2 points *1
		/A2	Alarm output 4 points *1 *12
		/A3	Alarm output 6 points *1
		/A4	Alarm output 12 points *1 *9 *12
		/A5	Alarm output 24 points *1 *2 *8 *12
		/C2	RS-232 interface *3
		/C3	RS-422A/485 interface *3
		/D5	VGA output
		/F1	FAIL/Status output *2 *4 *9
		/F2	FAIL + Alarm output 22 points *1 *4 *8 *12
		/H2	Clamped input terminal (detachable)
		/H5	Desktop type (only for /P1 model, without power cable, screw type power terminal) *5
		/H5[ ]	Desktop type *5 *6
		/M1	Mathematical functions *12
		/N1	Cu10,Cu25 RTD input/3 leg isolated RTD
		/N2	3 leg isolated RTD *7
		/N3	Extended input type (PR40-20, Pt50, etc.)
		/P1	24VDC/AC power supply *5
		/R1	Remote control *12
		/TPS4	24VDC transmitter power supply (4 loops) *8
		/TPS8	24VDC transmitter power supply (8 loops) *8 *9 *12
		/KB1	Easy text entry (with input terminal) *10 *11
		/KB2	Easy text entry (without input terminal) *10
		/USB1	USB interface
		/PM1	Pulse input (including remote control and mathematical functions) *12
		/CC1	Calibration correction function
		/MC1	External input function *13
		/BT2	Multi-batch function *14
		/CP1	PROFIBUS-DP communication interface *3
		/AS1	Advanced security function

\*1 /A1, /A2, /A3, /A4, /A5, /F2 cannot be specified together.

\*2 /A5 and /F1 cannot be specified together.

\*3 /C2, /C3 and /CP1 cannot be specified together.

\*4 /F1 and /F2 cannot be specified together.

\*5 In case that 24 VDC/AC power supply (/P1) and desktop type are specified together, /H5 must be specified.

/P1 and /H5[ ] cannot be specified together.

\*6 /H5[ ]

- D: Power cord UL, CSA st'd
- F: Power cord VDE st'd
- R: Power cord SAA st'd
- J: Power cord BS st'd
- H: Power cord GB st'd

\*7 /N2 can be specified for only DX2010, DX2020, DX2030, DX2040 and DX2048.

\*8 /TPS4, /TPS8, /A5 and /F2 cannot be specified together.

\*9 In case that /TPS8 is specified, combination of /A4/F1 cannot be specified together.

\*10 /KB1 and /KB2 cannot be specified together.

\*11 In case that /KB1 is specified, remote input terminal (438227) is included.

\*12 In case that /PM1 is specified, /A5, /F2, /M1 and /R1 cannot be specified. And combination of /A2/F1 and combination of /A4/TPS8 cannot be specified together.

\*13 /MC1 can be specified for only DX2010, DX2020, DX2030, DX2040 and DX2048.

\*14 /BT2 can be specified for only DX2010, DX2020, DX2030, DX2040 and DX2048.

In case that standard memory is specified, maximum number of batches is 6.

### Application Software

Model code	Description	O S
DXA120	DAQSTANDARD software	Windows 2000/XP/Vista/7
DXA170	DAQStudio software (optional)	Windows XP/Vista/7
DXA250	DAQManager (optional)	Windows XP/Vista/7

## STANDARD ACCESSORIES

Product	Qty
Mounting brackets	2
Terminal screws	5
Door lock key	2
Operation guide	1
Instruction manual (CD)	1
DAQSTANDARD software (CD)	1
CF card (128MB)	1
Power cable *1	1

\*1 For /H5[ ] option

### For / KB1 option


Product	Qty
Remote control terminal (438227)	1
AA alkali dry battery	2
Labels for remote control terminal	2

## OPTIONAL ACCESSORIES

Product	Model code (part number)	Specification
Shunt resistor (for screw input terminal)	415920	250 $\Omega$ ±0.1%
	415921	100 $\Omega$ ±0.1%
	415922	10 $\Omega$ ±0.1%
Shunt resistor (for clamped input terminal)	438920	250 $\Omega$ ±0.1%
	438921	100 $\Omega$ ±0.1%
	438922	10 $\Omega$ ±0.1%
CF card adapter	772090	–
CF card	772093	512MB
	772094	1GB
Mounting bracket	B9900BX	–
Door lock key	B8706FX	–
Remote control terminal	438227	For /KB1, /KB2 option
Validation document	438230	For /AS1 option (CD)


## DIMENSIONS

### Dimensions

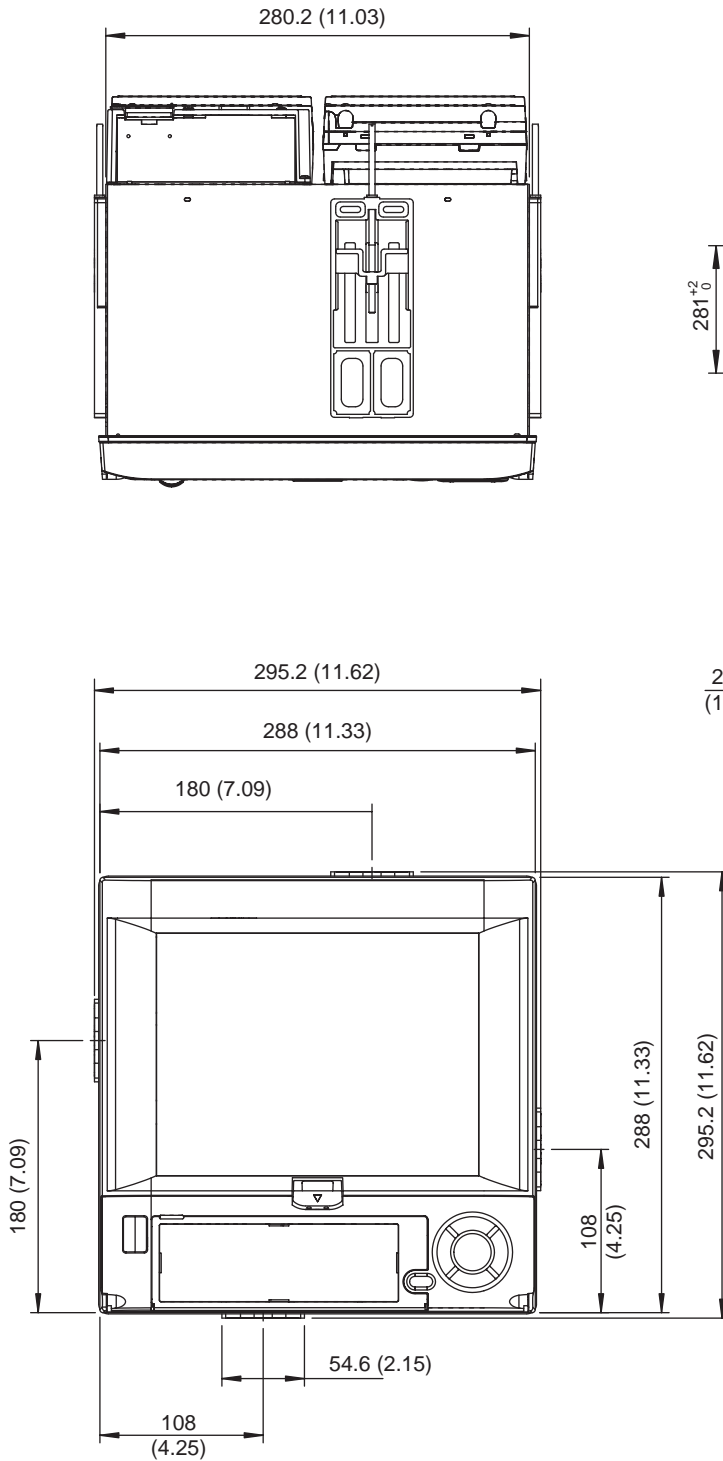

### Panel Cutout & Spacing


Unit : mm  
(approx.inch)

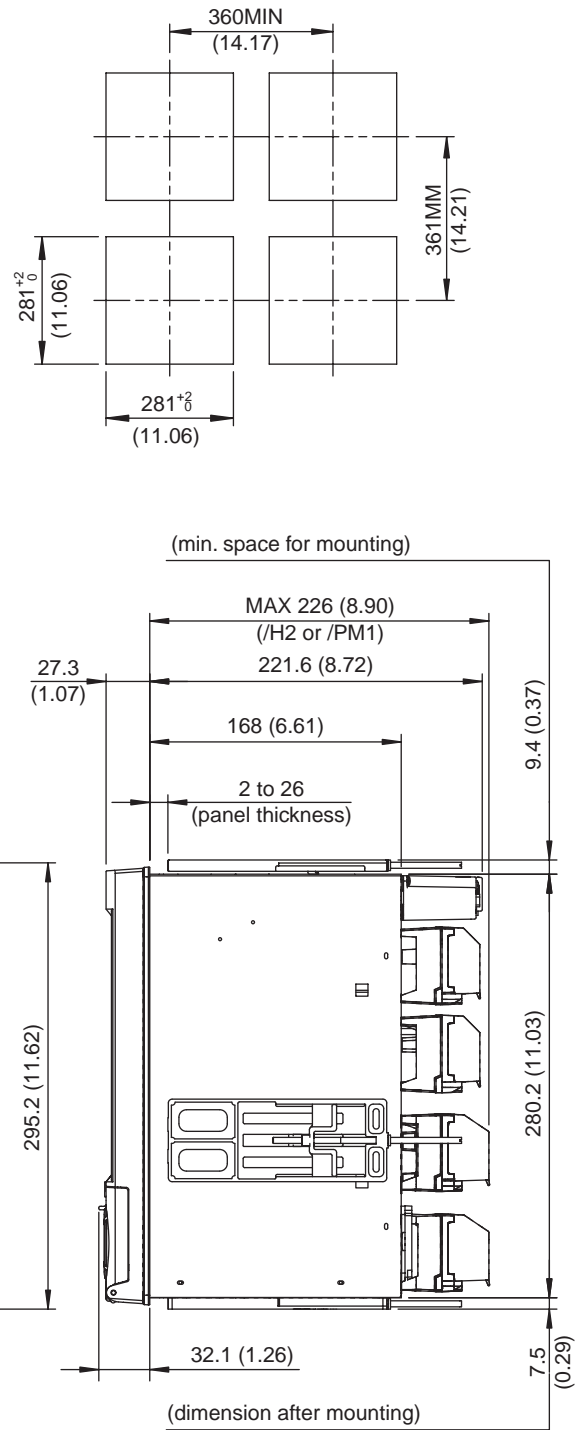

Note: If not specified, the tolerance is  $\pm 3\%$ . However, for dimensions less than 10mm, the tolerance is  $\pm 0.3\text{mm}$ .


**Desk-top type**

Unit : mm  
(approx.inch)

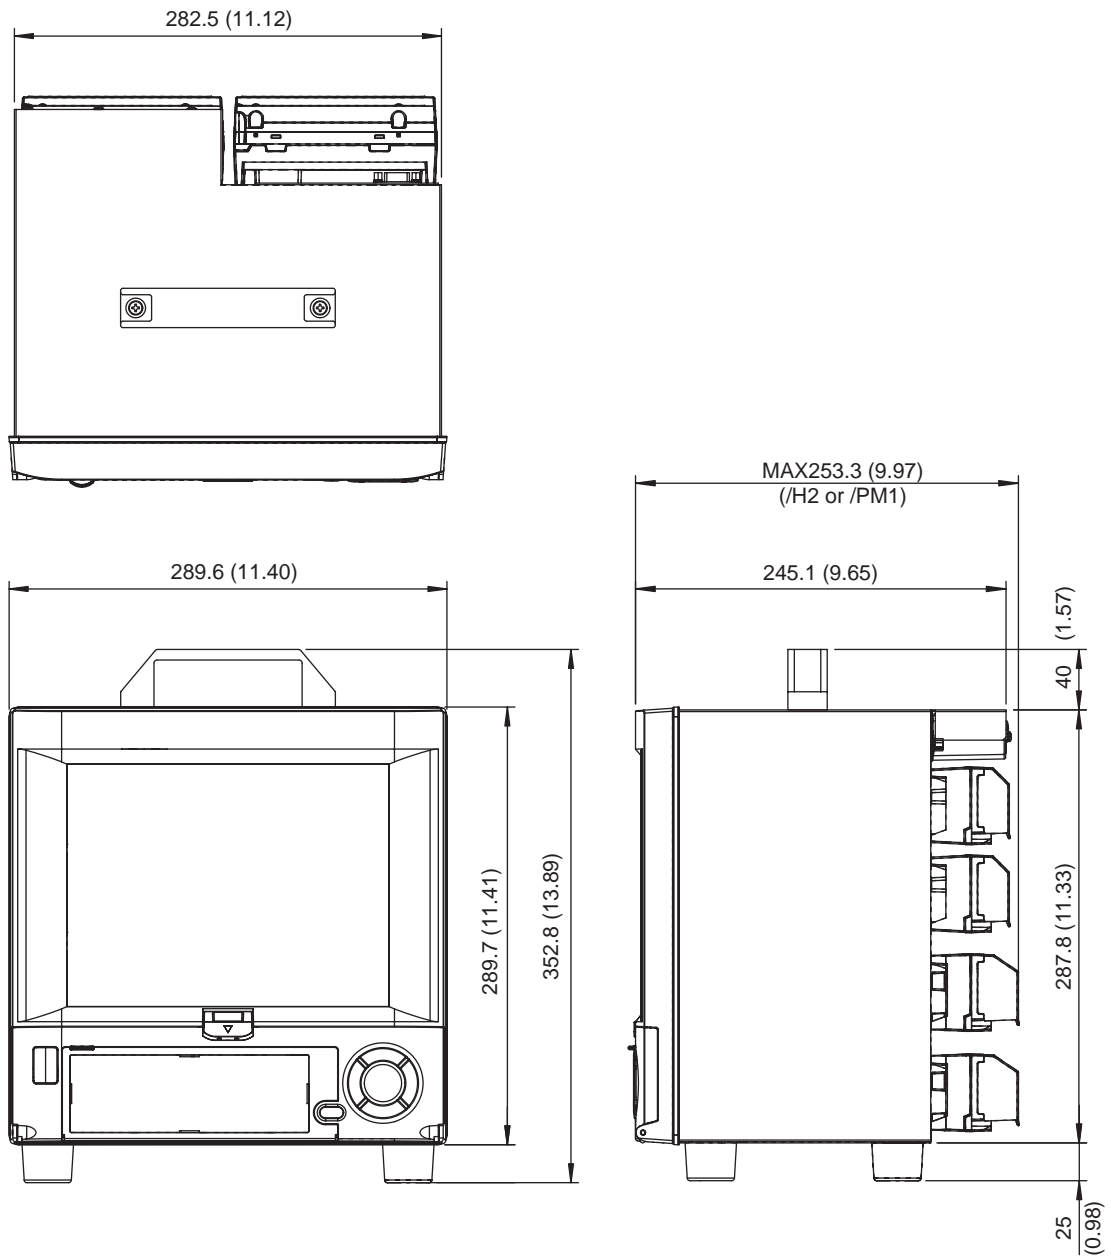


Note: If not specified, the tolerance is  $\pm 3\%$ . However, for dimensions less than 10mm, the tolerance is  $\pm 0.3\text{mm}$ .


**Rear View**

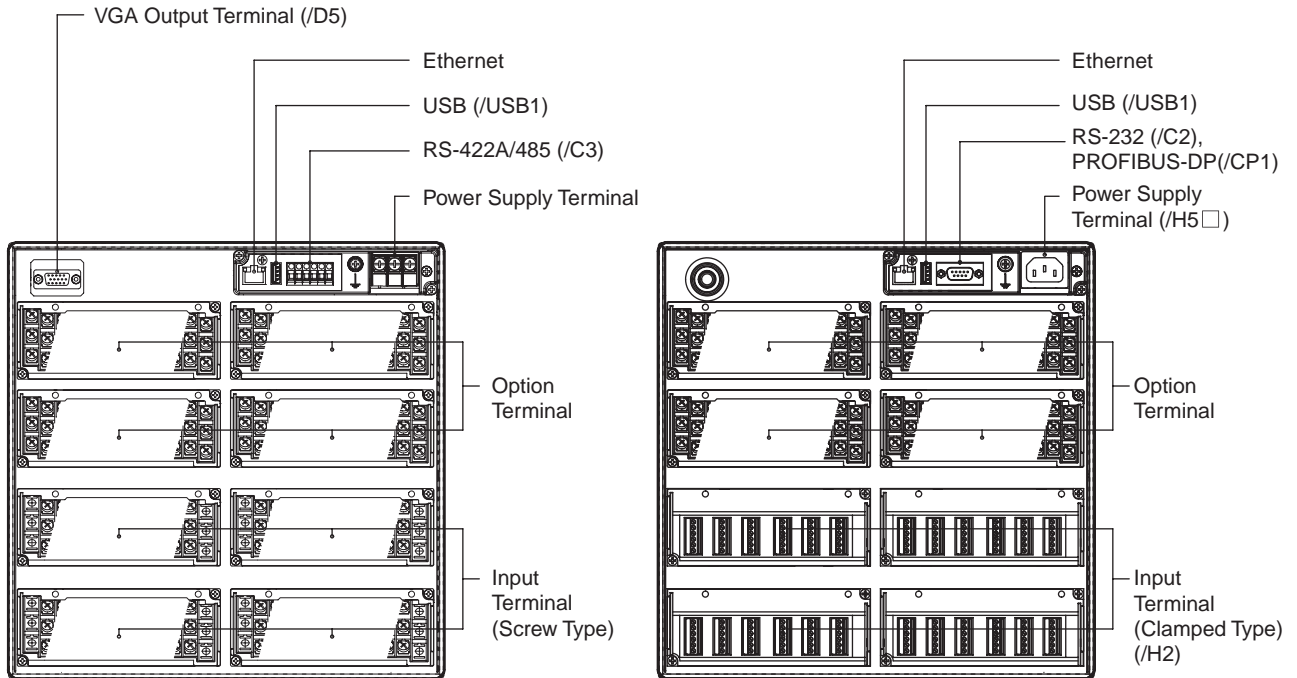


**Power Supply Terminal**



**RS-422-A/485 Terminal**



**RS-232 Terminal**




1	N.C.
2	RD
3	SD
4	N.C.
5	SG
6	N.C.
7	RS
8	CS
9	N.C.


**Input Terminals**

Screw Terminals



DX2004, DX2008



DX2010, DX2020, DX2030, DX2040




DX2048




Clamped Terminals (/H2)


DX2004, DX2008



DX2010, DX2020, DX2030, DX2040

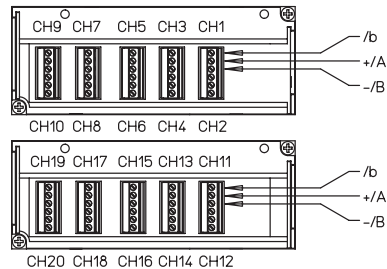


DX2048

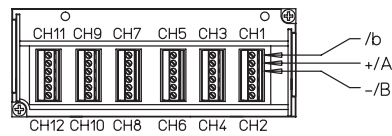


**Option Terminals**


/A1/F1/PM1 Combination




/A2/F1/R1 Combination




/A3/R1 Combination



/A4/TPS4 Combination

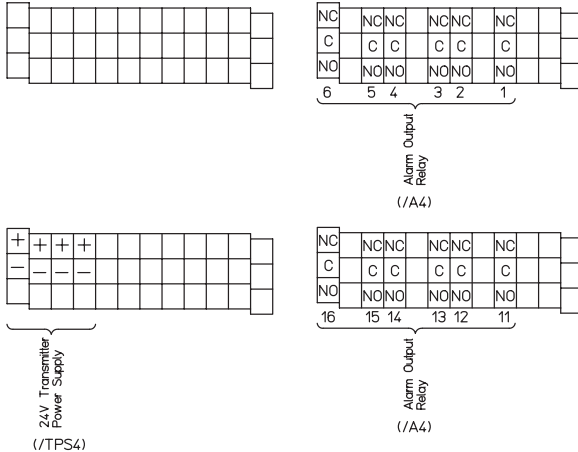

/A5/R1 Combination

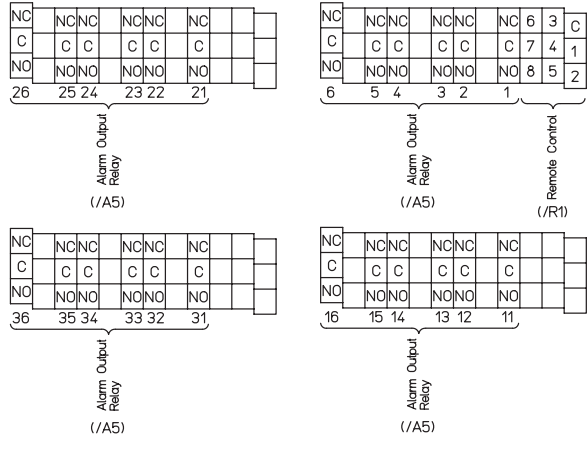

The TCP/IP software used in this product and the document for that TCP/IP software are based in part on BSD networking software, Release 1 licensed from The Regents of the University of California.

- DAQSTATION, DXAdvanced and DAQstudio are registered trademark of Yokogawa Electric Corporation.
- Microsoft, MS and Windows are registered trademarks of Microsoft Corporation USA.
- Lotus and 1-2-3 are registered trademark of Lotus Development Corporation.
- Pentium are registered trademarks of Intel Corporation.
- Ethernet is a registered trademark of XEROX Corporation.
- Modbus is a registered trademark of AEG Schneider.
- PROFIBUS-DP is a registered trademark of PROFIBUS User Organization.
- EtherNet/IP is a trademark of ODVA (Open DeviceNet Vendor Association).
- Kerberos is a trademark of MIT.
- Other company and/or product names are registered trade mark of their manufactures.