



# General Specifications

## UT55A/UT52A Digital Indicating Controllers



GS 05P01C31-01EN

[Style: S1]

### Overview

The UT55A/UT52A digital indicating controllers employ an easy-to-read, 14-segment large color LCD display, along with navigation keys, thus greatly increasing the monitoring and operating capabilities. A ladder sequence function is included as standard. The short depth of the controller helps save instrument panel space. The UT55A/UT52A also support open networks such as Ethernet communication.

### Features

- A 14-segment, active (PV display color changing function) color LCD display is employed.
- Two five-digit, high-resolution displays are possible. Alphabet letters can be displayed in an easy-to-read manner. The guide display shows parameter names.
- Easy to operate
- Navigation keys (SET/ENTER and Up/Down/Left/Right arrow keys) are employed to facilitate making settings.
- 65 mm depth
- The small depth enables the mounting in a thin and small instrumented panel.
- Ladder sequence function is included as standard. This function allows for creating a simple sequence control. Dedicated LL50A Parameter Setting Software (sold separately) allows for performing programming using a ladder language.
- Various built-in open network functions such as Ethernet are available.
- Easy connection with various vendors' PLCs is possible.
- Quick setting function
- Setting only the minimum necessary parameters for operation is possible (For single-loop control only)
- Equipped with a multitude of functions
- Universal I/O and eight control modes (cascade control, etc) are included as standard. PID control, heating/cooling control, feed forward control, etc. are available.



Table of Number of Inputs and Outputs

Model and suffix code (See the model code)	Number of analog input points	Number of analog output points (*1)	Number of contact input points (*2)	Number of contact output points (*3)
UT55A				
•×0			3	3
•×1×	2		9 (8)	8
•×2×	2		4 (3)	3
•×3×			8	8
•×4×	2		4 (3)	3
•×5×	2		9 (8)	8
•×6×			8	18
•×7×	4		6 (5)	3
UT52A				
•×0×			3	3
•×1×	2		3	3
•×2×	2		4 (3)	3
•×3×			5	5

- \*1: Excluding control output
- \*2: The numbers in parentheses show the numbers of points with RSP direct input option (/DR).
- \*3: Excluding control output relays

### Control Computation Function

#### (1) Combination of types of control and control modes

Types of control	Control mode							
	2	3	4	5	6	7	8	
PID control	√	*5	√	√	√	√	√	
ON/OFF control (*5)	√	N/A	N/A	N/A	N/A	N/A	N/A	
Two-position, two-level control (*6)	√	N/A	N/A	N/A	N/A	N/A	N/A	
Heating and cooling control (*6)	√	√	√	√	√	√	√	
Sample PI control	√	N/A	N/A	N/A	√	√	√	
Batch PID control	√	N/A	N/A	N/A	√	√	√	
Feedforward control	√	N/A	N/A	N/A	N/A	N/A	√	

- √: Available
- \*5: Not selectable for Position proportional type
- \*6: Selectable for heating and cooling control

### Functional Specifications

#### Control Specifications

##### (1) Control Mode

Control functions of the controller can be set as control modes.

Control mode	Function
	Single-loop control
2	Cascade primary-loop control (*4)
3	Cascade secondary-loop control (*4)
4	Cascade control (*4)
5	Loop control for backup (*4)
6	Loop control with PV switching (*4)
7	Loop control with PV auto-selector (*4)
8	Control with PV-hold function

\*4: Remote auxiliary analog input is required.

##### 2) Control period

Selectable from 50, 100, and 200 ms

Ladder computation period is the same as control period.



**(2) Control Computation Function**

- (a) Target setting point and the number of PID parameter groups  
 Respectively, eight sets of target setpoints, alarm setpoints, and PID parameters can be set. For cascade control, respectively, eight sets can be set for main (primary side) and slave (secondary side).
- (b) Selecting the PID parameter group  
 The following PID parameter groups can be selected.
- Target setpoint number (SPNO) (The PID number can be set arbitrarily.)
  - Measured input zone PID
  - Target setpoint zone PID
  - Reached target setpoint zone PID
- (c) Auto-tuning
- Tuning results can be selected from two options, Normal or Stable.
  - Tuning output limit can be set. (It cannot be used in heating/cooling control.)
- (d) "Super" function: Overshoot-suppressing function
- (e) "Super 2" function: Hunting-suppressing function
- (f) STOP preset output function
- (g) Input ERROR preset output function
- (h) MANUAL preset output function

**(3) Operation Mode Switching**

<b>Operation mode switching</b>	AUTO/MANUAL and RUN/STOP switching CASCADE/AUTO/MANUAL switching REMOTE/LOCAL switching
---------------------------------	---

**(4) Control Parameter Setting Range**

<b>Proportional band</b>	0.1 to 999.9%
<b>Integral time</b>	1 to 6000 sec. or 0.1 to 600.0 sec., or OFF (using manual reset)
	1 to 6000 sec. or 0.1 to 600.0 sec., or OFF
	0.0 to 100.0% of measured input range width
<b>Preset output value</b>	-5.0 to 105.0% (however, 0 mA or less cannot be output)
<b>High/low output limiter</b>	-5.0 to 105.0% Low limit setpoint < high limit setpoint
<b>Tight shut function</b>	When manual control is carried out with 4 to 20 mA output, control output can be reduced to about 0 mA.
<b>Rate-of-change limiter of output</b>	0.1 to 100.0%/sec., OFF
<b>Output deadband</b>	For heating and cooling control: -100.0 to 50.0% For position proportional control: 1.0 to 10.0%

**Alarm Functions**

- Types of Alarm

<b>Measured value alarm</b> <b>Deviation alarm</b> <b>Rate-of-change alarm</b>	PV (measured value) high/low limit alarm Deviation high/low limit alarm Deviation high and low limits alarm Deviation within high and low limits alarm Analog input PV high/low limit alarm Analog input RSP (ROMOTE) SP high/low limit alarm Auxiliary analog input high/low limit alarm Feedback input high/low limit alarm PV rate-of-change alarm
<b>Setpoint alarm</b>	SP (setpoint) high/low limit alarm Target SP high/low limit alarm Target SP deviation high/low limit alarm Target SP deviation high and low limits alarm Target SP deviation within high and low limits alarm
<b>Output alarm</b>	Control output high/low limit alarm Cooling control output high/low limit alarm
<b>Other alarms</b>	Heater disconnection alarm (for /HA option) Self-diagnosis alarm FAIL

- Alarm Functions

<b>Alarm output action</b>	Alarm stand-by action Alarm latch (forced reset) function Alarm hysteresis Alarm ON/OFF delay timer
<b>Number of alarm settings</b>	8 (per loop)
<b>Number of alarm output points</b>	Up to 18 (differs by model code)

**Contact I/O Function**

This function allows for allocating the input error condition, operation condition, alarm condition or other conditions to the contact input and contact output.

<b>Contact input</b>	AUTO/MANUAL switching
	REMOTE/LOCAL switching
	STOP/START switching
	Switching to CASCADE
	Switching to AUTO
	Switching to MANUAL
	Switching to REMOTE
	Switching to LOCAL
	AUTO-TUNING START/STOP switching
	OUTPUT TRACKING switching
	Two-input switching
	PV Hold
<b>Contact output</b>	LCD backlight ON/OFF switching
	Message interrupt displays 1 through 4
	SP number specification
	PID number specification
	Manual preset output number specification
<b>Contact output</b>	Loop 1 alarms 1 through 8
	Loop 2 alarms 1 through 8 (for cascade control)
	Status output



## Ladder Sequence Function

### (1) Number of I/O Points

	UT55A	UT52A
Number of digital input points	Up to 9	Up to 5
Number of digital output points	Up to 18	Up to 5

This is limited by the number of contact I/O signal points. (See the model code.)

### (2) Types of Command

	Number of commands	Remark
Number of basic command types	11	Load, AND, OR, Timer, Counter, etc.
Number of application command types	73	Comparison, reverse, addition/subtraction/multiplication/division, logic operation, high/low limiter, etc.

### (3) Sequence Device

	Types of device	Number of points
Digital I/O	Input relay	9 (max)
	Output relay	18 (max)
Internal device	M relay (bit data)	128
	DAT register (data)	20
	P register (parameter)	10
	K register (constant)	30
Special device	Special relay (bit data)	12

Process data and process relay can be used besides the above-mentioned.

### (4) Program capacity

Program capacity: 400 steps \*

\*: Available number of steps differs according to the parameters, using command and control period.

## Communication Function

	Function	Method	Interface	Targets	Max connection	Communication Data
Modbus/TCP	A standard industry protocol allowing communications between the controller and devices such as PCs, PLCs, and DCSs.	Server	Ethernet	PLC and others	2 connections	PV, SP, OUT, ALM etc
		Gateway	Ethernet +RS-485	RS-485: UT55A/UT52A (*1)	30 units	
Slave		RS-485	PLC and others, UT55A/UT52A (*2)	31 units		
Peer to peer	Multi-drop	RS-485 (2 wire only)	UT55A/UT52A	Read/Write: 4 units Read only: 28 units		
Coordinated Communication	Master/Slave	RS-485	UT55A/UT52A (*2)	Master: 1 unit Slave: 31 units		
PC link	The proprietary Yokogawa protocol allowing communications to PCs, PLCs and touch panels.	Slave	RS-485	PC and others, UT55A/UT52A (*2)	31units	
Ladder						A protocol to communicate to PLCs.

\*1: UT digital indicating controller, Signal conditioner JUXTA, Power monitor POWERCERT can be connected.

\*2: UT digital indication controllers can be connected.

## Physical interface

Ethernet Standard: IEEE802.3 (10BASE-T, 100BASE-TX)

Max segment length: 100m

Max. Connecting Configuration: Cascade Max. 4 level (10BASE-T), Max. 2 level (100BASE-TX)

RS-485 Standard: EIA RS-485

Communication method: Two-wire half-duplex or four-wire half-duplex, start-stop synchronization, and non-procedural

Baud rate: 600, 1200, 2400, 4800, 9600, 19200 or 38400bps (\*3) Peer to peer communication is only 19200bps

Maximum communication distance: 1200m

Terminating resistor: 220Ω (External)

\*3: 38400bps for UT55A model code: Type 3 = 1 and UT52A model code Type 2 = 1 only.



## Hardware Specifications

### Display Specifications

- PV display  
5-digit, 14-segment active color LCD (white/red)  
Character height: 21.5 mm for UT55A and 13.0 mm for UT52A
- Data display  
5-digit, 11-segment color LCD (orange)
- Bar graph display  
12-segment color LCD (orange and white)

### Universal Input Specifications

- Number of input points: 1
- Types of input, instrument range, and measurement accuracy (see the table below)

Types of input		°C	°F	Accuracy
Thermocouple	K	•270.0 to 1370.0°C	•450.0 to 2500.0°F	±0.1% of instrument range ±1 digit for 0°C or more
		•270.0 to 1000.0°C	•450.0 to 2300.0°F	
		•200.0 to 500.0°C	•200.0 to 1000.0°F	
	J	•200.0 to 1200.0°C	•300.0 to 2300.0°F	±0.2% of instrument range ±1 digit for less than 0°C
		•270.0 to 400.0°C	•450.0 to 750.0°F	However, ±2% of instrument range ±1 digit for less than +200°C of thermocouple K ±1% of instrument range ±1 digit for less than +200°C of thermocouple T
	T	0.0 to 400.0°C	•200.0 to 750.0°F	
	B	0.0 to 1800.0°C	32 to 3300°F	±0.15% of instrument range ±1 digit for 400°C or more ±5% of instrument range ±1 digit for less than 400°C
	S	0.0 to 1700.0°C	32 to 3100°F	±0.15% of instrument range ±1 digit
	R	0.0 to 1700.0°C	32 to 3100°F	
	N	•200.0 to 1300.0°C	•300.0 to 2400.0°F	±0.1% of instrument range ±1 digit ±0.25% of instrument range ±1 digit for less than 0°C
	E	•270.0 to 1000.0°C	•450.0 to 1800.0°F	±0.1% of instrument range ±1 digit for 0°C or more
	L	•200.0 to 900.0°C	•300.0 to 1600.0°F	
U	•200.0 to 400.0°C	•300.0 to 750.0°F	±0.2% of instrument range ±1 digit for less than 0°C However, ±1.5% of instrument range ±1 digit for less than +200.0°C of thermocouple E	
Resistance-temperature detector (RTD) 3-wire	W(*2)	0.0 to 2300.0°C	32 to 4200°F	±0.2% of instrument range ±1 digit
	Platinel 2	0.0 to 1390.0°C	32.0 to 2500.0°F	±0.1% of instrument range ±1 digit
	PR20-40	0.0 to 1900.0°C	32 to 3400°F	±0.5% of instrument range ±1 digit for 800°C or more Accuracy not guaranteed for less than 800°C
	W97 Re3-W75 Re25	0.0 to 2000.0°C	32 to 3600°F	±0.2% of instrument range ±1 digit
	JPt100	•200.0 to 500.0°C	•300.0 to 1000.0°F	±0.1% of instrument range ±1 digit(*1)
		•150.00 to 150.00°C	•200.0 to 300.0°F	±0.1% of instrument range ±1 digit
	Pt100	•200.0 to 850.0°C	•300.0 to 1560.0°F	±0.1% of instrument range ±1 digit(*1)
		•200.0 to 500.0°C	•300.0 to 1000.0°F	
	Standard signal	0.400 to 2.0000 V	-	
		1.000 to 5.000 V	-	
4.00 to 20.00 mA		-		
0.000 to 2.000 V		-	±0.1% of instrument range ±1 digit	
DC voltage	0.00 to 10.00 V	-		
	-10.00 to 20.00 mV	-		
DC current	0.00 to 20.00 mA	-		

The accuracy is that in the standard operating conditions: 23 ±2°C, 55 ±10%RH, and power frequency at 50/60 Hz.

- \*1: ±0.3°C and ±1 digit in the range between 0 and 100°C  
±0.5°C ±1 digit in the range between -100 and 200°C
- \*2: W-5% Re/W-26% Re (Hoskins Mfg.Co.), ASTM E988
- Applicable standards: JIS, IEC and DIN (ITS-90) for thermocouples and resistance-temperature detectors (RTD)
- Input sampling period: Synchronized to control period
- Burnout detection  
Upscale and downscale of function, and OFF can be specified for the standard signal of thermocouple and resistance-temperature detector (RTD).  
For integrated signal input, 0.1 V or 0.4 mA or less is judged as a burnout.
- Input bias current: 0.05 µA (for thermocouple and resistance-temperature detector (RTD))
- Resistance-temperature detector (RTD) measured current: About 0.16 mA
- Input resistance  
1 MΩ or more for thermocouple/mV input  
About 1 MΩ for voltage input  
About 250 Ω for current input (with built-in shunt resistance)
- Allowable signal source resistance  
250 Ω or less for thermocouple/mV input  
Effect of signal source resistance: 0.1 µV/Ω or less  
2 kΩ or less for DC voltage input  
Effect of signal source resistance: about 0.01%/100 Ω
- Allowable wiring resistance  
Up to 150 Ω per line for resistance-temperature detector (RTD) input (conductor resistance between the three lines shall be equal)  
Effect of wiring resistance: ±0.1°C/10 Ω
- Allowable input voltage/current  
±10 V DC for thermocouple/mV/mA or resistance-temperature detector (RTD) input  
±20 V DC for V input  
±40 mA DC for mA input
- Noise reduction ratio  
40 dB or more (at 50/60 Hz) in normal mode  
120 dB or more (at 50/60 Hz) in common mode
- Reference junction compensation error  
±1.0°C (15 to 35°C)  
±1.5°C (•10 to 5°C and 35 to 50°C)

### Auxiliary Analog Input Specifications

- This function can be used for remote setpoint setting, external compensating input, auxiliary input for computation, etc.
- Number of input points: see the model code table.
- For types of input, instrument range, and measurement accuracy, see the table below.

Types of input	Instrument range	Accuracy
Integrated signal	0.400 to 2.000 V	±0.2% of instrument range ±1 digit
	1.000 to 5.000 V	±0.1% of instrument range ±1 digit
DC voltage	0.000 to 2.000 V	±0.2% of instrument range ±1 digit
	0.00 to 10.00 V	±0.1% of instrument range ±1 digit
DC voltage with High input impedance	0.00 to 1.25 V	±0.1% of instrument range ±1 digit

- Input sampling period: Synchronized to control period
- Input resistance: about 1 MΩ  
However, 10 MΩ or more for high input impedance



## Remote Input with Direct Input Specifications (for /DR Option)

### (3-wire or 4-wire when RTD is selected)

- Number of input points: 1 point
- Types of input, instrument range, and measurement accuracy are the same as those of universal input (standard), except for the table below.

Types of input	Instrument range		Accuracy	
	$^{\circ}\text{C}$	$^{\circ}\text{F}$		
4-wire RTD	Jp1100	$\cdot 200.0$ to $500.0^{\circ}\text{C}$	$\cdot 300.0$ to $1000.0^{\circ}\text{F}$	$\pm 0.5^{\circ}\text{C} \pm 1$ digit
		$\cdot 150.00$ to $150.00^{\circ}\text{C}$	$\cdot 200.0$ to $300.0^{\circ}\text{F}$	$\pm 0.2^{\circ}\text{C} \pm 1$ digit
	Pt100	$\cdot 200.0$ to $850.0^{\circ}\text{C}$	$\cdot 300.0$ to $1560.0^{\circ}\text{F}$	$\pm 0.1\%$ of instrument range $\pm 1$ digit (*)
		$\cdot 200.0$ to $500.0^{\circ}\text{C}$	$\cdot 300.0$ to $1000.0^{\circ}\text{F}$	$\pm 0.5^{\circ}\text{C} \pm 1$ digit
	$\cdot 150.00$ to $150.00^{\circ}\text{C}$	$\cdot 200.0$ to $300.0^{\circ}\text{F}$	$\pm 0.2^{\circ}\text{C} \pm 1$ digit	

\*:  $\pm 0.5^{\circ}\text{C} \pm 1$  digit in the range of  $\cdot 200.0$  to  $500.0^{\circ}\text{C}$

- Input sampling period: Synchronized to control period

## Analog Output Specifications

- Number of points
  - Control output (heating-side output): 1 point (standard), which is shared with transmission output
  - Cooling-side output: 1 point, which is shared with transmission output
- Output functions
  - Current output or voltage pulse output
- Current output
  - 4 to 20 mA DC or 0 to 20 mA DC/load resistance 600  $\Omega$  or less
- Current output accuracy
  - $\pm 0.1\%$  of span (however,  $\pm 5\%$  of span for 1 mA or less)
  - The accuracy is that in the standard operating conditions:  $23 \pm 2^{\circ}\text{C}$ ,  $55 \pm 10\% \text{RH}$ , and power frequency at 50/60 Hz
- Voltage pulse output
  - Application: time proportional output
  - ON voltage: 12 V or more/load resistance of 600  $\Omega$  or more
  - OFF voltage: 0.1 V DC or less
  - Time resolution: 10 ms or 0.1% of output value, whichever is larger

## Relay Contact Output Specifications

- Types of contact and number of points
  - Control relay output: one 1c-contact point
  - Cooling output of heating and cooling control: one 1c-contact point (For UT55A only)
  - For UT52A heating/cooling output: 2 1a-contact points
  - Alarm output: 3 1a-contact points (Common is separated)
- Contact rating
  - 1c-contact: 3 A at 250 V AC or 3 A at 30 V DC (resistance load)
  - 1a-contact:
    - For alarm output: 1 A at 240 V AC or 3 A at 30 V DC (resistance load)
    - For UT52A control relay output: 3 A at 240 V AC or 3 A at 30 V DC (resistance load)
- \*: This cannot be used for a small load of 10 mA or less.
- Application: time proportional output, alarm output, FAIL output, etc.
- Time resolution for control output: 10 ms or 0.1% of output value, whichever is larger

## Step Response Time Specifications

Within 500 ms (for a control period of 50 ms or 100 ms)

Within 1 s (for a control period of 200 ms)

(Response time at 63% of transmission output when a change is made stepwise in the range between 10 and 90% of input span)

## Position Proportional Output Specifications

- Position signal input
  - Slide resistance: 100  $\Omega$  to 2.5 k $\Omega$  of total resistance
  - 100% side and slide line: with disconnection detection
  - 0% side: without disconnection detection
  - Current input: 4 to 20 mA DC (with disconnection detection)
- Sampling period: 50 ms
- Measurement resolution: 0.1% of input span
- Position proportional relay output
  - UT55A: Two 1a-contact points, 3 A at 250 V AC or 3 A at 30 V DC (resistance load)
  - UT52A: Two 1a-contact points, 3 A at 240 V AC or 3 A at 30 V DC (resistance load)
- \*: This cannot be used for a small load of 10 mA or less.

## Retransmission Output Specifications

- Number of points: 1 point (standard), which is shared with 15 V DC loop power supply
- Additional 2 points when analog control output and cooling-side analog control output are not used
- Output function: current output
  - 4 to 20 mA DC or 0 to 20 mA DC/load resistance 600  $\Omega$  or less
- Current output accuracy:  $\pm 0.1\%$  of span (however,  $\pm 5\%$  of span for 1 mA or less)
  - The accuracy is that in the basic operating conditions:  $23 \pm 2^{\circ}\text{C}$ ,  $55 \pm 10\% \text{RH}$ , and power frequency at 50/60 Hz

## 15V DC Loop Power Supply Specifications

- Number of points: 1 point (standard), which is shared with retransmission output
  - Control output (1 point) can also be used.
- Supply voltage: 14.5 to 18.0 V DC
- Maximum supply current: about 21 mA (with short-circuit current limiting circuit)

## Contact Input Specifications

- Number of points: 3 points (standard)
  - For the maximum number of points, see the model and suffix code table.
- Input type: no-voltage contact input or transistor contact input
- Input contact capacity: 12 V DC, 10 mA or more
  - Be sure to use a contact with a minimum ON current of 1 mA or more
- ON/OFF detection
  - For no-voltage contact input:
    - Contact resistance 1 k $\Omega$  or less in ON state
    - Contact resistance 50 k $\Omega$  or more in OFF state
  - Transistor contact input:
    - 2 V or less in ON state
    - Leak current 100  $\mu\text{A}$  or less in OFF state
- Status detection minimum hold time: control period + 50 ms
- Application: SP switching, operation mode switching, event input



Transistor Contact Output Specifications

- Number of points: see the model and suffix code table
Output form: open collector (sink current)
Output contact capacity: Up to 24 V DC, 50 mA
Output time resolution: min 50 ms

Heater Break Alarm Specifications (for /HA Option)

- Function: Measures the heater current using an external current transformer (CT) and generates a heater break alarm when the measured value is smaller than the disconnection detection value.
Number of input points: 2 points
Number of output points: 2 points (transistor contract output)
CT input resistance: about 9.4 Ohm
CT input range: 0.0 to 0.1 Arms (0.12 Arms or more cannot be applied)
Heater current alarm setting range: 0.0 to 300.0 Arms
Heater current measured value display range: 0.0 to 360.0 Arms
Recommended CT: CT from URD Co. Ltd.
CTL-6-S-H: CT ratio 800, measurable current range: 0.0 to 80.0 Arms
CTL-12L-3C: CT ratio 3000, measurable current range: 0.0 to 180.0 Arms
Heater current measurement period: 200 ms
Heater current measurement accuracy: +/-5% of CT input range +/-1 digit (CT error is not included)
Heater current detection resolution: Within 1/250 of CT input range span
Disconnection detection ON time: Minimum 200 ms. (for time proportional output)

24 V DC Loop Power Supply Specifications (for /LP Option)

- Application: Power is supplied to the 2-wire transmitter.
Supply voltage: 21.6 to 28.0 V DC
Rated current: 4 to 20 mA DC
Maximum supply current: About 30 mA (with short-circuit current limiting circuit)

Safety and EMC Standards

- Safety: Compliant with IEC/EN61010-1 (CE), approved by CAN/CSA C22.2 No. 61010-1 (CSA), UL61010-1 is under application.
Installation category: CAT. II
Pollution degree: 2
Measurement category: I (CAT. I)
Rated measurement input voltage: Max. 10 V DC
Rated transient overvoltage: 1500 V (\*)
EMC standards: Compliant with CE marking
EN 61326-1 Class A, Table 2 (For use in industrial locations),
EN 61326-2-3
EN 55011 Class A, Group 1
EN 61000-3-2 Class A
EN 61000-3-3
C-tick mark
EN 55011 Class A, Group 1
The instrument continues to operate at a measurement accuracy of within +/-20% of the range during testing.
RoHS regulation: Compliant

Power Supply Specifications and Isolation

- Power supply
Rated voltage: 100 to 240 V AC (+10%/-15%), 50/60 Hz
24 V AC/DC (+10%/-15%) (When the /DC option is specified)
Power consumption: UT55A: 18 VA (For the /DC option. DC: 9 VA, AC: 14 VA)
UT52A: 15 VA (For the /DC option. DC: 7 VA, AC: 11 VA)
Storage: Nonvolatile memory
Allowable power interruption time: 20 ms (at 100 V AC)
Withstanding voltage
2300 V AC for 1 minute between primary and secondary terminals
1500 V AC for 1 minute between primary terminals
500 V AC for 1 minute between secondary terminals
(Isolation specifications)

Table with 3 columns: Terminal type, Internal circuits, Power supply. Lists various terminals like PV, Remote, Control, Alarm, Contact, Ethernet, and Current transformer.

The circuits divided by lines are insulated mutually.

Environmental Conditions

Normal operating conditions

- Ambient temperature: -10 to 50°C (-10 to 40°C for side-by-side mounting of controllers)
Ambient humidity: 20 to 90% RH (no condensation)
Magnetic field: 400 A/m or less
Continuous vibration (at 5 to 9 Hz) Half amplitude of 1.5 mm or less
Rapid vibration: 14.7 m/s^2, 15 s or less
Impact: 98 m/s^2 or less, 11 msec.
Installation altitude: 2,000 m or less above sea level
Warm-up time: 30 minutes or more after the power is turned on
Start-up time within 10 s



Transportation and Storage Conditions

- Temperature: •25 to 70°C
• Temperature change rate: 20°C per hour or less
• Humidity: 5 to 95%RH (no condensation)


Effects of Operating Conditions

- Effect of ambient temperature
For voltage or TC input:
±1 µV/°C or ±0.01% of F.S. (instrument range)/°C, whichever is greater

- For RTD input:
±0.05°C/°C (ambient temperature) or less
For current input:
±0.01% of F.S. (instrument range)/°C
For analog output:
±0.02% of F.S./°C or less
• Effect of power supply fluctuation:
For analog input: ±0.05% of F.S. (instrument range) or less
For analog output: ±0.05% of F.S. or less
(Each within rated voltage range)

Block Diagram

Single Loop Control (For the block diagrams of other control modes, see the user manual)

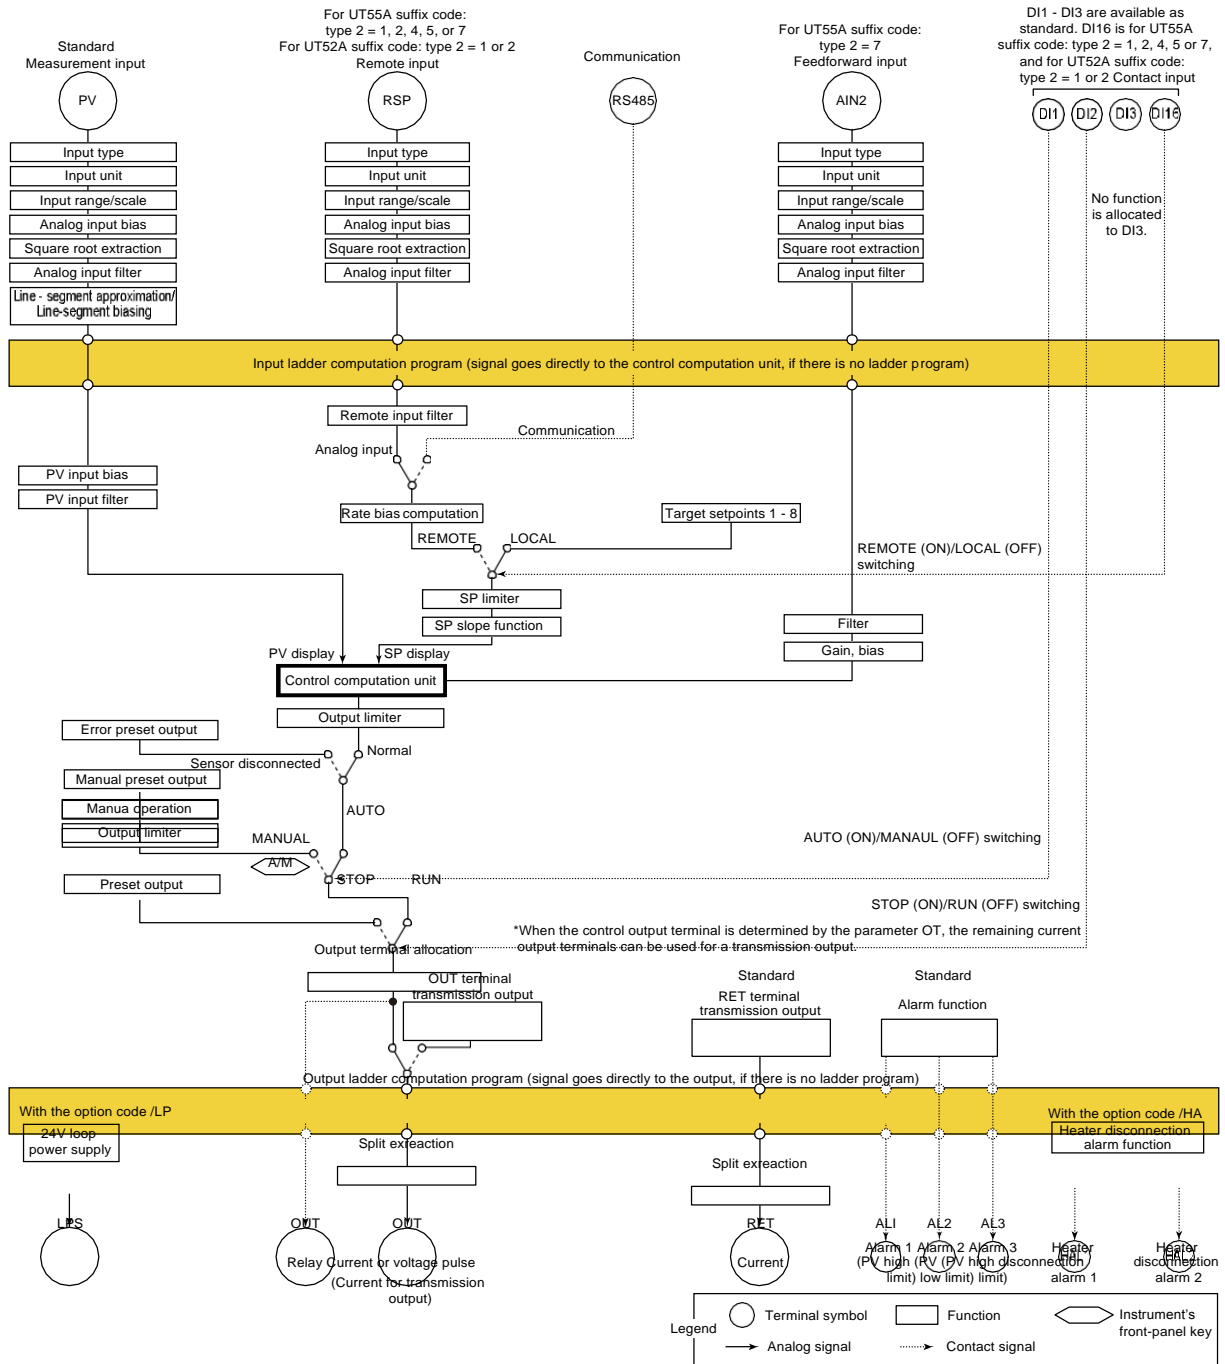



บริษัท เอดีดี เฟอร์เนส จำกัด

ADD FURNACE CO.,LTD.

44 ซอยบรมราชชนนี 70 ถนนบรมราชชนนี แขวงศาลาธรรมสพน์ เขตทวีวัฒนา กรุงเทพฯ 10170


โทร: 02-888-3472 โทร: ออกแบบ:08-08-170-170 แฟกซ์: 02-888-3258

https://www.add-furnace.com E-mail: sales@add-furnace.com

### Terminal Arrangement

Terminal Arrangement for UT55A Single Loop Control (for the terminal arrangements of other control modes, see the user manual.)

A function can be allocated to terminals for which no function was allocated at the factory.

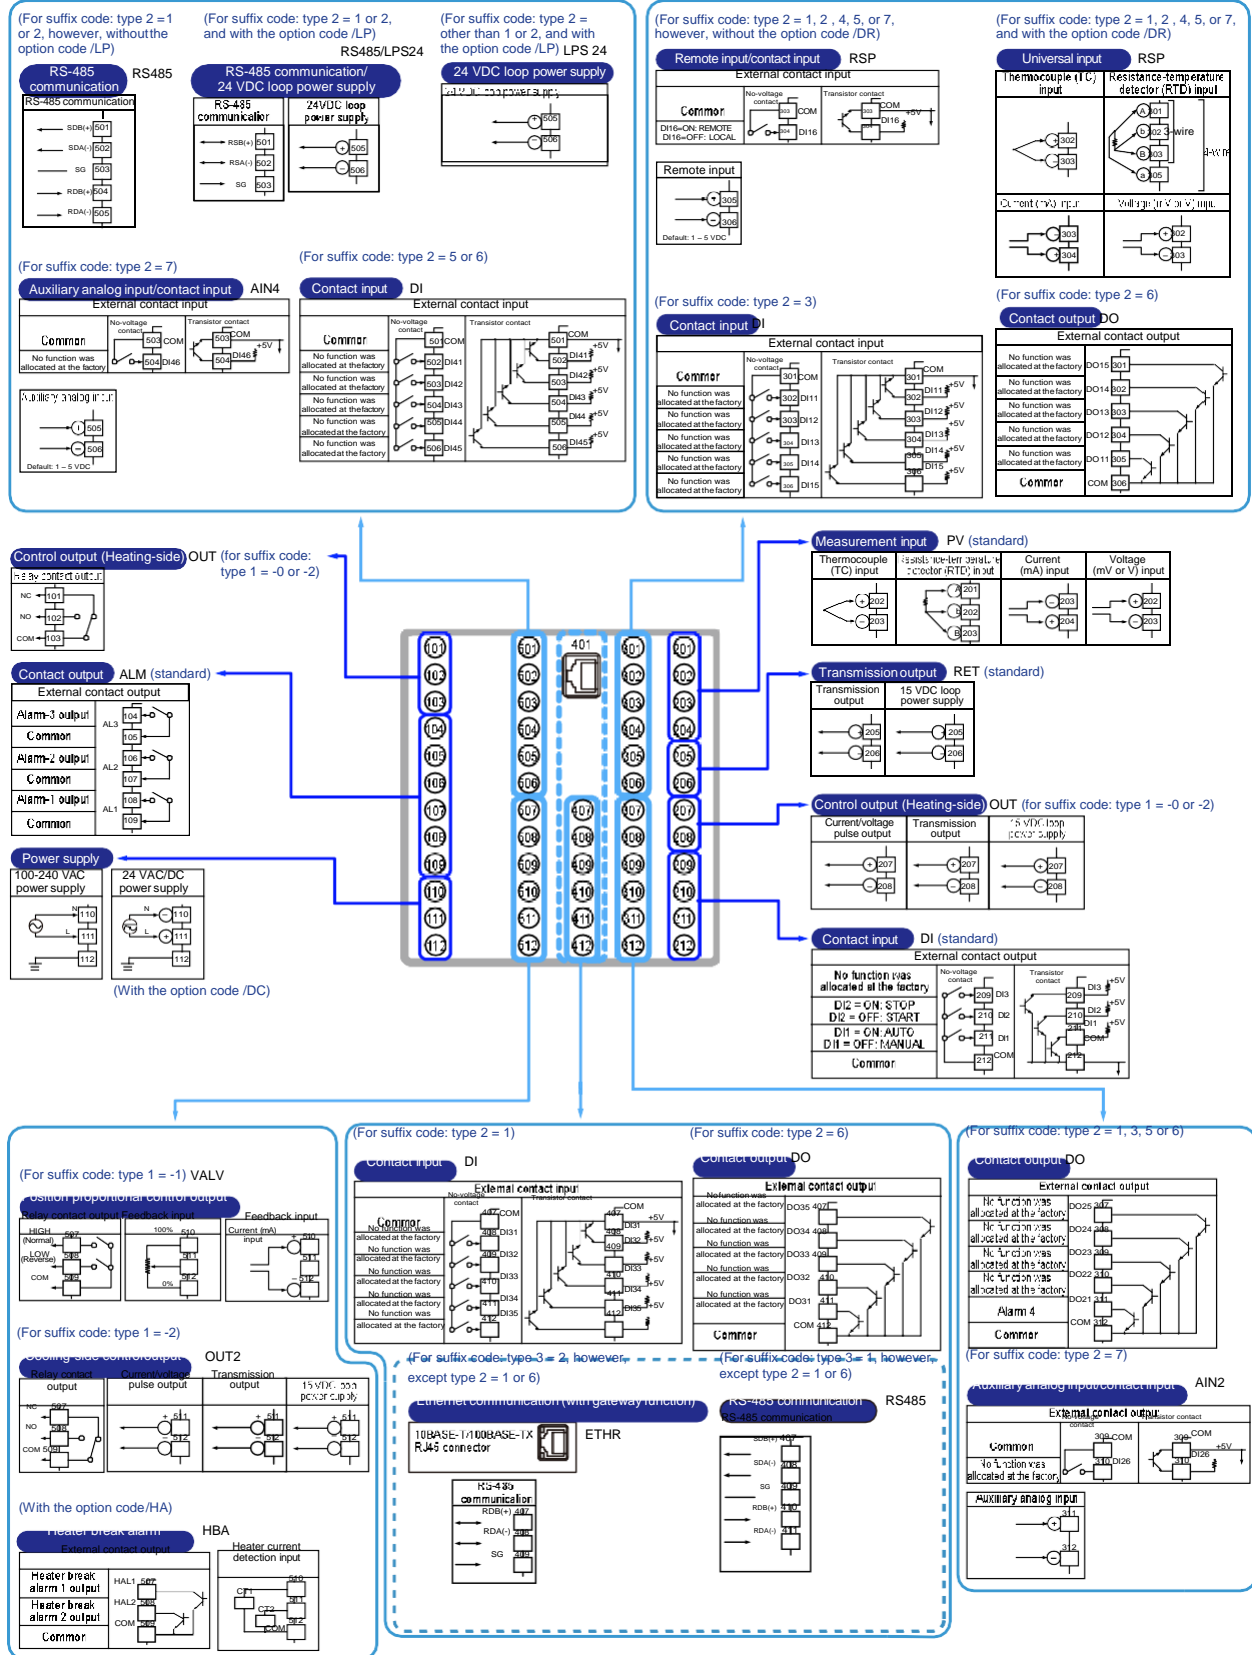





บริษัท เอดีดี เฟอร์เนส จำกัด

ADD FURNACE CO.,LTD.



44 ซอยบรมราชชนนี 70 ถนนบรมราชชนนี แขวงศาลาธรรมสพน์ เขตทวีวัฒนา กรุงเทพฯ 10170

โทร: 02-888-3472 โทร: ออกแบบ:08-08-170-170 แฟกซ์: 02-888-3258

https://www.add-furnace.com E-mail: sales@add-furnace.com

Terminal Arrangement for UT52A Single Loop Control (for the terminal arrangements of other control modes, see the user manual.)

A function can be allocated to terminals for which no function was allocated at the factory.

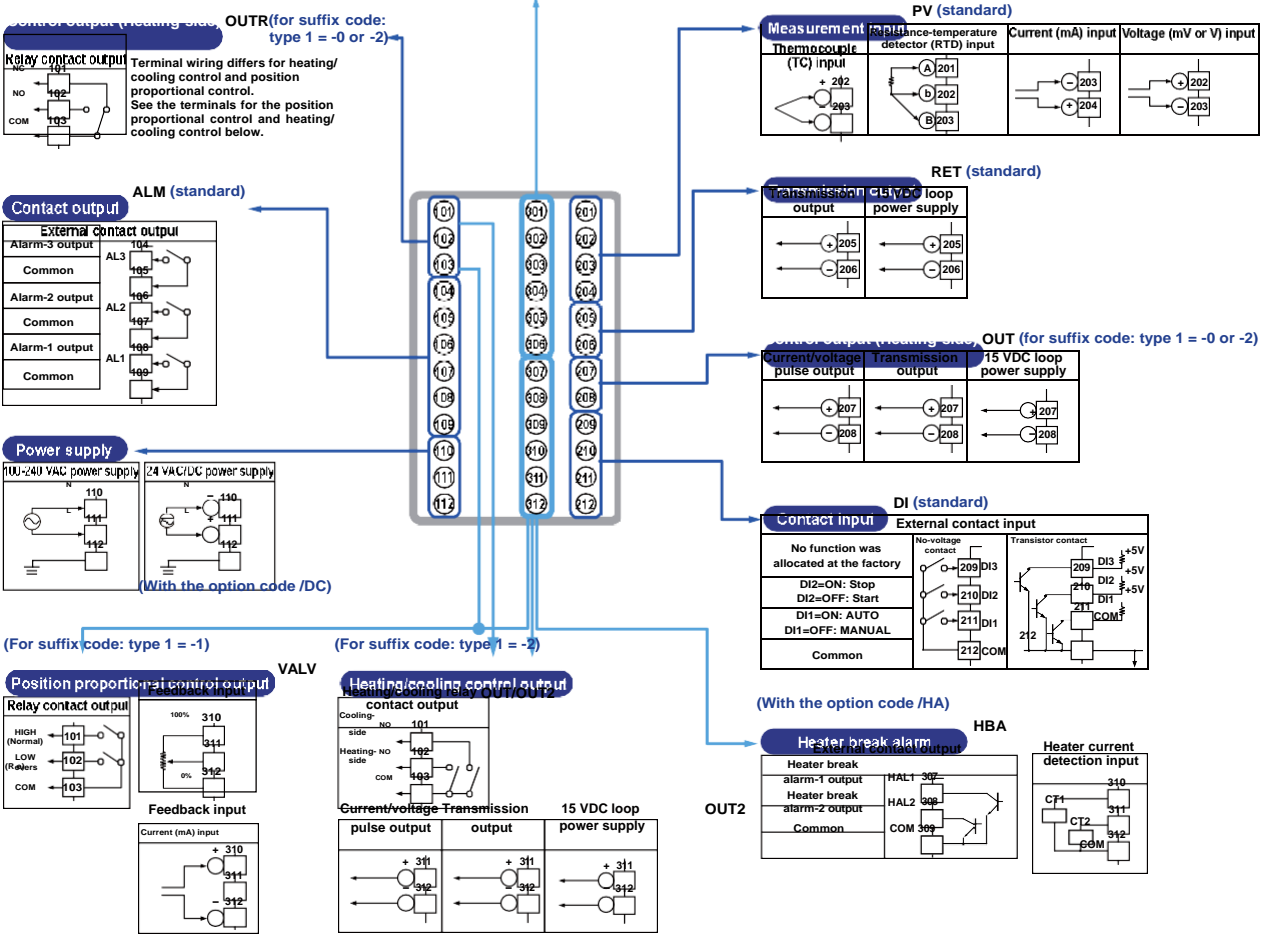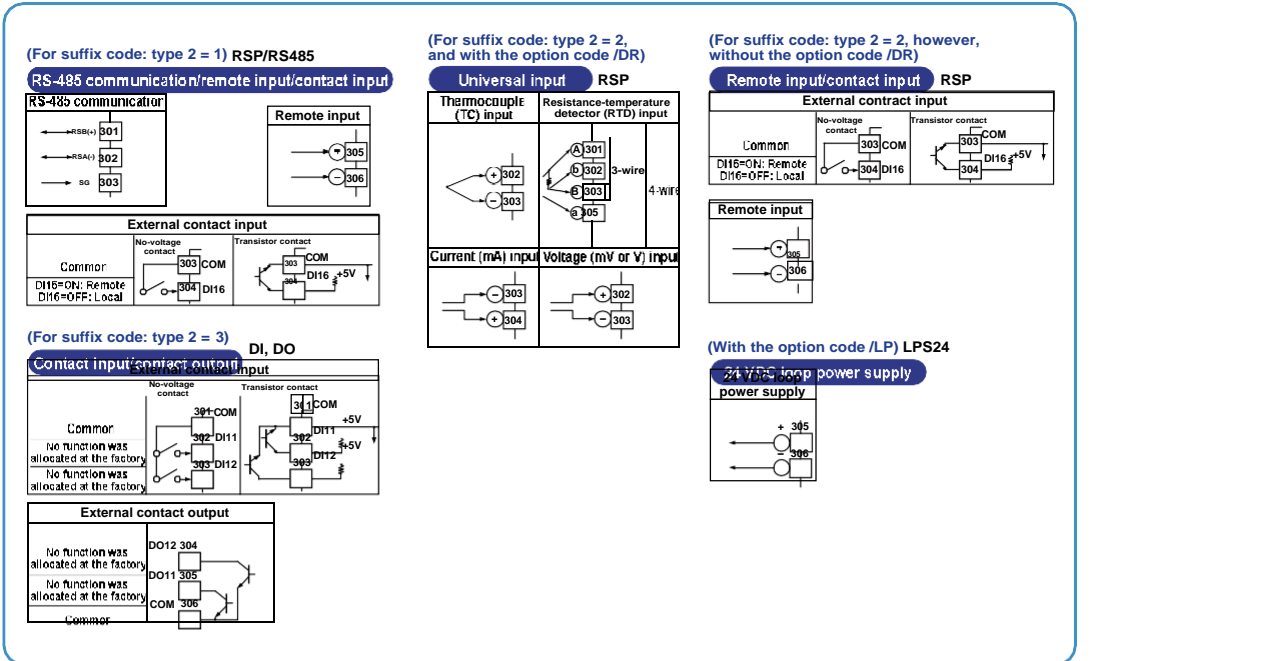



บริษัท เอดีดี เฟอร์เนส จำกัด

ADD FURNACE CO.,LTD.

44 ซอยบรมราชชนนี 70 ถนนบรมราชชนนี แขวงศาลาธรรมสพน์ เขตทวีวัฒนา กรุงเทพฯ 10170


โทร: 02-888-3472 โทร: ออกแบบ:08-08-170-170 แฟกซ์: 02-888-3258

https://www.add-furnace.com E-mail: [sales@add-furnace.com](mailto:sales@add-furnace.com)

## External Dimensions and Panel Cutout Dimensions


UT55A

Unit: mm

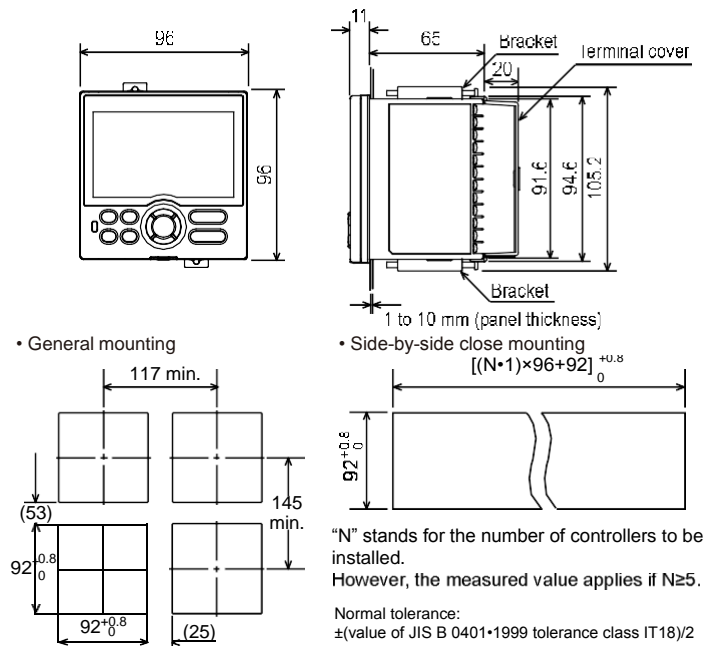

UT52A

Unit: mm

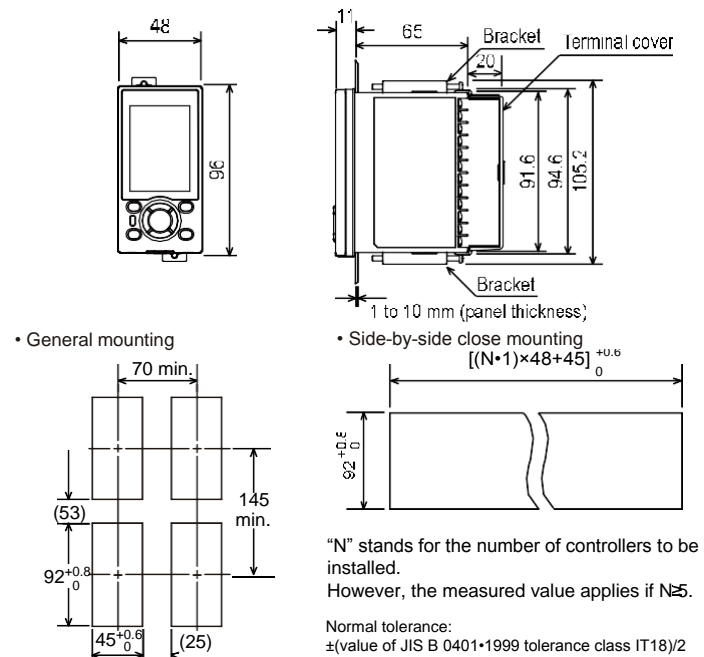

## Construction, Mounting, and Wiring

- Dust-proof and drip-proof: IP56 (Front panel) (Except for side-by-side close mounting)/NEMA4 \*
- \*: Hose down test only
- Material: Polycarbonate resin (Flame retardancy: UL94 V-0)
- Case color: Light gray
- Weight: 0.5 kg or less
- External dimensions (mm):  
 UT55A: 96 (width) x 96 (height) x 65 (depth from the panel surface)

- UT52A: 48 (width) x 96 (height) x 65 (depth from the panel surface)
- Mounting: Direct panel mounting; mounting bracket, one each for upper and lower mounting
- Panel cutout dimensions (mm):  
 UT55A:  $92^{+0.8/0}$  (width) x  $92^{+0.8/0}$  (height)  
 UT52A:  $45^{+0.6/0}$  (width) x  $92^{+0.8/0}$  (height)
- Mounting position: Up to 30 degrees above the horizontal. No downward tilting allowed.
- Wiring: M3.0 screw terminal with square washer (signal wiring and power)



บริษัท เอดีดี เฟอร์เนส จำกัด

**ADD FURNACE CO.,LTD.**

44 ซอยบรมราชชนนี 70 ถนนบรมราชชนนี แขวงศาลาธรรมสพน์ เขตทวีวัฒนา กรุงเทพฯ 10170

โทร: 02-888-3472 โทร: ออกแบบ:08-08-170-170 แฟกซ์: 02-888-3258

https://www.add-furnace.com E-mail: [sales@add-furnace.com](mailto:sales@add-furnace.com)

## Model and Suffix Code

Model	Suffix code	Optional suffix code	Description
<b>UT55A</b>			Digital Indicating Controller (provided with retransmission output or 15 V DC loop power supply , 3 DIs, and 3 DOs) (Power supply 100-240 V AC)
Type 1: Basic control	-0 -1 -2		Standard type Position proportional type Heating/cooling type
Type 2: Functions (*1)	0 1 2 3 4 5 6 7		None Remote (1 additional aux. analog) input, 6 additional DIs, 5 additional DOs, and RS-485 communication (Max. 19.2 k ps, 2-wire/4-wire) (*2) Remote (1 additional aux. analog) input, 1 additional DI, and RS-485 communication (Max. 19.2 k ps, 2-wire/4-wire) (*2) 5 additional DIs and 5 additional DOs Remote (1 additional aux. analog) input and 1 additional DI Remote (1 additional aux. analog) input, 6 additional DIs, and 5 additional DOs 5 additional DIs, and 15 additional DOs 3 additional aux. analog inputs and 3 additional DIs
Type 3: Open networks	0 1 2		None RS-485 communication (Max. 38.4 kbps, 2-wire/4-wire) Ethernet communication (with serial gateway function)
Display language	-10 -20 -30 -40		English German French Spanish
Fixed code		-00	Always "-00"
Options		/DR /LP /HA /DC /CT	Additional direct input (TC & 3-wire/4-wire RTD) and current to Remote (1 additional aux. analog) input, 1 DI to be deleted (*3) 24 V DC loop power supply (*4) Heater break alarm (this can be specified when 0 is set to the type 1 code) Power supply 24 V AC/DC Coating (without safety standard (UL/CSA) and CE markings)

\*1: When "1" or "6" is specified for the Type 2 code, only "0" can be specified for the Type 3 code.

\*2: When the /LP option is specified, the RS-485 communication for "1" or "2" of the Type 2 code is 2-wire system.

\*3: When any of "1", "2", "4", "5", or "7" is specified for the Type 2 code, the /DR option can be specified.

\*4: The /LP option can be specified in the combination of Type 2 code (any of "0", "2", "3", or "4") and Type 3 code (any of "0" or "1"). Additionally the /LP option can be specified in the combination of Type 2 code "1" and Type 3 code "0".

Model	Suffix code	Optional Suffix code	Description
<b>UT52A</b>			Digital Indicating Controller (provided with retransmission output or 15 V DC loop power supply , 3 DIs, and 3 DOs) (Power supply 100-240 V AC)
Type 1: Basic control	-0 -1 -2		Standard type Position proportional type Heating/cooling type
Type 2: Functions	0 1 2 3		None Remote (1 additional aux. analog) input, 1 additional DI, and RS-485 communication (Max. 38.4 kbps, 2-wire) Remote (1 additional aux. analog) input and 1 additional DI 2 additional DIs, and 2 additional DOs
Type 3: Open networks	0		None
Display language	-10 -20 -30 -40		English German French Spanish
Fixed code		-00	Always "-00"
Options		/DR /LP /HA /DC /CT	Additional direct input (TC & 3-wire/4-wire RTD) and current to Remote (1 additional aux. analog) input, 1 DI to be deleted (*5) 24 V DC loop power supply (*6) Heater break alarm (this can be specified when 0 is set to the type 1 code) Power supply 24 V AC/DC Coating (without safety standard (UL/CSA) and CE markings)

\*5: When "2" is specified for the Type 2 code, the /DR option can be specified.

\*6: The /LP option can be specified in the combination of Type 1 code (any of "0" or "1") and Type 2 code "0".

## Items to be specified when ordering

Model and suffix codes, whether User's Manual and QIC required.

## Standard accessories

Terminal cover, Brackets (mounting hardware), Unit label, Operation Guide for Single-loop Control, and User's Manual (CD-ROM version).

## Special Order Items

Model code	Suffix code	Description
<b>LL50A</b>	-00	Parameter Setting Software
<b>X010</b>	See the General Specifications (*)	Resistance Module

\*: Necessary to input current signal to voltage input terminal.