




Mesh Belt Balanced Belt K2




K2 - 15 - 20 - 3.0 - 2.6

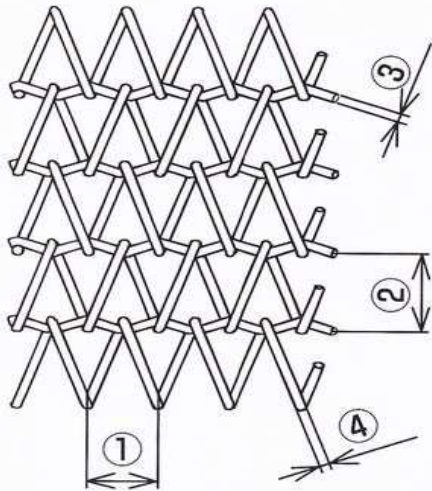

1. Advantages
2. Widest range of application.
3. Stable construction for straight belt running.
4. Japan Material
5. Material:
SUS304,SUS310S,SUS410,SUS430,AISI314,SUH330,
Inconel601,NCHW1,SWRM.
6. These belts can be used for sintering, brazing, hardening, firing, tempering, lehr....etc, It is important to select belt type and material which can endure high temperature.
7. Selecting belt for high temperature
8. Select material/alloy best suited to operating temperature and atmosphere gas.
9. Select belt type capable of enduring product load.
10. Select mesh specification suited to products.

Specification	Weight (kg/m ²)	Specification	Weight (kg/m ²)
K2 - 3 - 4 - 0.9 - 0.8	5.5	K2 - 8 - 12 - 2.3 - 2.0	12.1
K2 - 4 - 5 - 1.0 - 0.8	4.3	K2 - 12 - 18 - 2.3 - 2.0	7.4
K2 - 3 - 4 - 1.0 - 0.9	7.2	K2 - 8 - 12 - 2.3 - 2.3	15.3
K2 - 4 - 6 - 1.0 - 0.9	4.7	K2 - 10 - 15 - 2.6 - 2.3	12.3
K2 - 3 - 4 - 1.0 - 0.9	8.6	K2 - 15 - 20 - 2.6 - 2.3	8.0
K2 - 4 - 6 - 1.2 - 1.0	6.2	K2 - 10 - 15 - 2.6 - 2.6	15.3
K2 - 6 - 9 - 1.2 - 1.0	3.8	K2 - 15 - 20 - 3.0 - 2.6	10.6
K2 - 4 - 6 - 1.2 - 1.2	8.5	K2 - 10 - 15 - 3.2 - 3.0	21.9
K2 - 6 - 9 - 1.4 - 1.2	5.6	K2 - 15 - 20 - 3.2 - 3.0	13.9
K2 - 9 - 13 - 1.6 - 1.2	3.9	K2 - 20 - 25 - 3.4 - 3.0	10.7
K2 - 5 - 7 - 1.4 - 1.4	9.3	K2 - 15 - 20 - 3.4 - 3.2	16.0
K2 - 8 - 12 - 1.6 - 1.4	5.5	K2 - 25 - 30 - 4.0 - 3.4	10.4
K2 - 5 - 7 - 1.6 - 1.6	12.7	K2 - 20 - 25 - 4.0 - 3.4	14.4
K2 - 7 - 10 - 1.8 - 1.6	8.7	K2 - 15 - 20 - 4.0 - 4.0	25.4
K2 - 10 - 15 - 1.8 - 1.6	5.6	K2 - 20 - 25 - 5.0 - 4.0	21.5
K2 - 6 - 9 - 1.8 - 1.8	12.6	K2 - 30 - 40 - 5.0 - 4.0	12.7
K2 - 10 - 15 - 2.0 - 1.8	7.2	K2 - 25 - 30 - 5.0 - 5.0	23.5
K2 - 6 - 9 - 2.0 - 2.0	16.1	K2 - 10 - 50 - 6.0 - 5.0	15.0
Customer Order	xx	Customer Order	xx

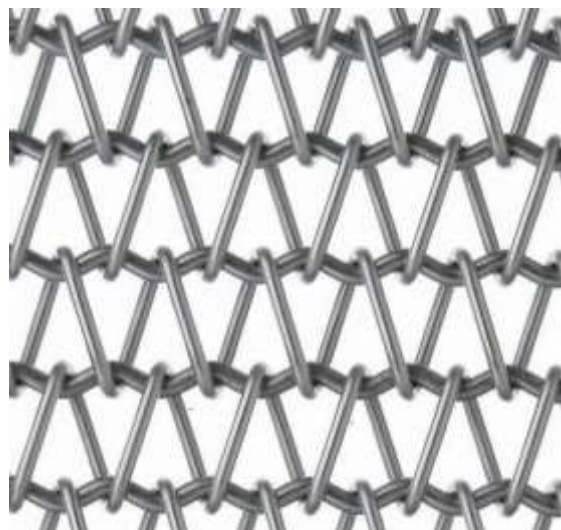



บริษัท เอดีดี เฟอร์เนส จำกัด

ADD FURNACE CO.,LTD.

44 ซอยบรมราชชนนี 70 ถนนบรมราชชนนี แขวงศาลาธรรมสพน์ เขตทวีวัฒนา กรุงเทพฯ 10170

โทร: 02-888-3472 โทร: ออกแบบ:08-08-170-170 แฟกซ์: 02-888-3258

<https://www.add-furnace.com> E-mail: sales@add-furnace.com

Materials	(%) Chemical components								Max.operating temperature °C
	C	Si	Mn	P	S	Ni	Cr	other	
SUS304	≤0.08	≤1.00	≤2.00	≤0.045	≤0.030	8.00~10.50	18.00~20.00		870
SUS310S	≤0.08	≤0.15	≤2.00	≤0.045	≤0.030	19.00~22.00	24.00~26.00		1090
SUH330	≤0.15	≤0.50	≤2.00	≤0.040	≤0.030	33.00~37.00	14.00~17.00		1150
AISI314	≤0.25	50~3.00	≤2.00	≤0.045	≤0.030	19.00~22.00	23.00~26.00		1150
Inconel601	≤0.1	≤0.50	≤1.00	≤0.030	≤0.015	58.00~63.00	21.00~25.00		1150
NCHW1	≤0.15	0.75~1.6	≤2.50	---	---	77.00	19.00~21.00	≤Fe 1.0	1150
SUS410	≤0.15	≤1.00	≤1.00	≤0.040	≤0.030	---	11.50~13.50		700
SUS430	≤0.12	≤0.75	≤1.00	≤0.040	≤0.030	---	16.00~18.00		700
DIN 1.4841	≤0.20	1.5~2.5	≤2.00	≤0.045	≤0.030	19.00~21.00	24.00~26.00		1150

