



บริษัท เอดีดี เฟอร์เนส จำกัด

ADD FURNACE CO.,LTD.

44 ซอยบรมราชชนนี 70 ถนนบรมราชชนนี แขวงศาลาธรรมสพน์ เขตทวีวัฒนา กรุงเทพฯ 10170

โทร: 02-888-3472 โทร: ออกแบบ:08-08-170-170 แฟกซ์: 02-888-3258

https://www.add-furnace.com E-mail: sales@add-furnace.com

High Pressure Industrial / Commercial Pounds-to-Pounds Regulators 1580V and AA1580V Series

Application


Designed to reduce LP-Gas and anhydrous ammonia container pressures to between 3 and 125 PSIG. Precision-built with a multi-million BTU capacity, the 1580V series is perfect for such big, tough jobs as crop dryers, asphalt batch mixing plants, road building “tar wagons”, heat treating and other large industrial and commercial loads. It’s also ideal as a first stage regulator in large multiple operations. The AA1580V series is ideal for use in anhydrous ammonia applications such as blue print machines and heat treating.

Features

- Large nozzle and straight through flow provides high capacity and resistance to freeze-up.
- O-ring on retainer assembly provides a dampening effect to reduce vibration.
- Suitable for both liquid and vapor service.
- Can be readily fitted with pressure gauge in 1/4” F. NPT port.

Materials

BodyForged Aluminum
 BonnetDie Cast Aluminum
 SpringSteel
 Valve Seat Discs.....Resilient Rubber
 DiaphragmsIntegrated Fabric and Synthetic Rubber

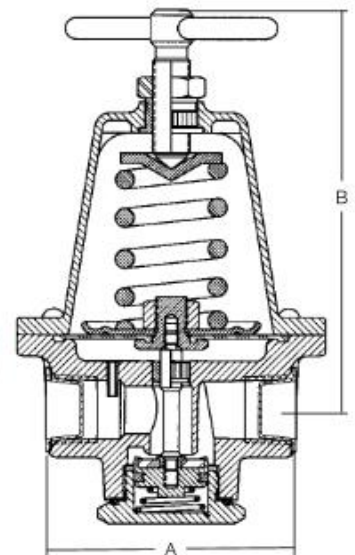



บริษัท เอดีดี เฟอร์เนส จำกัด

ADD FURNACE CO.,LTD.

44 ซอยบรมราชชนนี 70 ถนนบรมราชชนนี แขวงศาลาธรรมสพน์ เขตทวีวัฒนา กรุงเทพฯ 10170

โทร: 02-888-3472 โทร: ออกแบบ:08-08-170-170 แฟกซ์: 02-888-3258

<https://www.add-furnace.com> E-mail: sales@add-furnace.com

Ordering Information

Part Number	Service	Adjustment Method	Inlet & Outlet Connections	Recommended Delivery Pressure Range (PSIG)	A Width	B Height (max.)	Capacity Determined at Set Pressure of PSIG*	Capacity**	
1584VN	LP-Gas		½”F. NPT	3-30	2 ¹⁵ / ₁₆ ”	4 ⁷ / ₈ ”	20	7,000,000 BTU/hr. LPG	
1584VL				25-50			30	10,000,000 BTU/hr. LPG	
1584VH				45-125			60	10,000,000 BTU/hr. LPG	
AA1584VW	NH3			3-25			20	4,500 CFH NH	
AA1584VL				20-50			30	4,800 CFH NH3	
AA1584VH				45-125			60	5,100 CFH NH3	
1586VN	LP-Gas			¾”F. NPT	3-30	3 ½”	7”	20	7,500,000 BTU/hr. LPG
1586VL					25-50			30	14,000,000 BTU/hr. LPG
1586VH					45-125			60	14,000,000 BTU/hr. LPG
AA1586VW	NH3	3-25			20			7,700 CFH NH3	
AA1586V		20-50			60			8,900 CFH NH3	
AA1586VH		45-125			20			7,500,000 BTU/hr. LPG	
1588VN	LP-Gas			1”F. NPT	3-30			30	7,500,000 BTU/hr. LPG
1588VL					25-50			30	14,000,000 BTU/hr. LPG
1588VH					45-125			60	14,000,000 BTU/hr. LPG

* Set pressure is established with 100 PSIG inlet pressure and a flow of 500,000 BTU/hr. propane for 1580V Series, and 180 CFH/hr. NH3 for AA1584V and AA1586V Series. ** Capacity determined at 100 PSIG inlet, set pressure noted on chart at 20% drop. NOTE: Care must be taken to prevent re-liquification of propane at normal temperatures by heat tracing or other effective means. Use of a relief valve upstream or downstream of these regulators is recommended in accordance with NFPA 58