



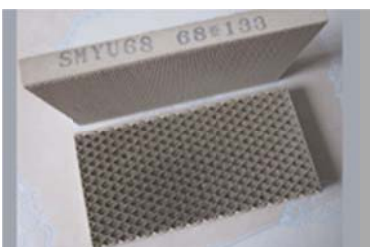



| | | | |
|---------------------------|---|---|-----------------------------|
| <p>SH2GT 46.5x133</p> |  | <p>Materials: Cordierite CO Discharged: <0.06 Temperature softening: 1230°C Open Porosity: 61% Air consumption: 0.13kg/h Weight: 0.05kg/sheet</p> | <p>W46.5mmxL133mmxH13mm</p> |
| <p>SL2WT 46.5x133</p> |  | <p>Materials: Cordierite CO Discharged: <0.06 Temperature softening: 1230°C Open Porosity: 61% Air consumption: 0.13kg/h Weight: 0.051kg/sheet</p> | <p>W46.5mmxL133mmxH13mm</p> |
| <p>SM2YT 46.5x133</p> |  | <p>Materials: Cordierite CO Discharged: <0.06 Temperature softening: 1230°C Open Porosity: 61% Air consumption: 0.13kg/h Weight: 0.055kg/sheet</p> | <p>W46.5mmxL133mmxH13mm</p> |
| <p>SMYT68 68x133</p> |  | <p>Materials: Cordierite CO Discharged: <0.06 Temperature softening: 1230°C Open Porosity: 61% Air consumption: 0.13kg/h Weight: 0.08kg/sheet</p> | <p>W68mmxL133mmxH13mm</p> |
| <p>SMYU68 68x13</p> |  | <p>Materials: Cordierite CO Discharged: <0.06 Temperature softening: 1230°C Open Porosity: 61% Air consumption: 0.13kg/h Weight: 0.09kg/sheet</p> | <p>W68mmxL133mmxH13mm</p> |
| <p>SLWT78 78x136</p> |  | <p>Materials: Cordierite CO Discharged: <0.06 Temperature softening: 1130°C Open Porosity: 61% Air consumption: 0.13kg/h Weight: 0.095kg/shee</p> | <p>W78mmxL136mmxH13mm</p> |



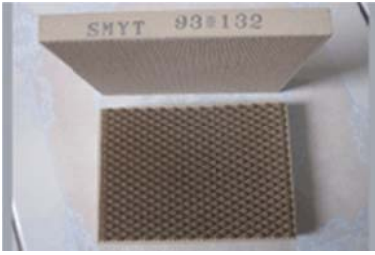

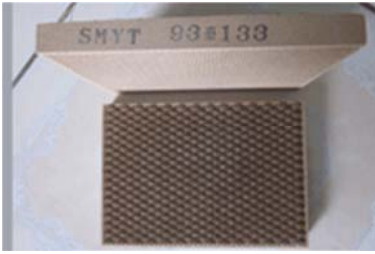
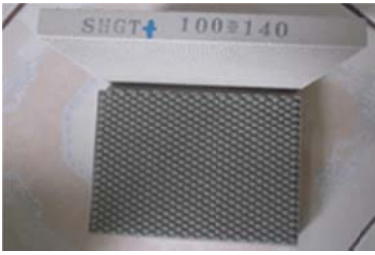


บริษัท เอบี เฟอเรนส จำกัด
ABB FURNACE CO., LTD

129/15, ม.17 ถนนพหลโยธินซอย 2 ซอย 36 เขต ทวีวัฒนา แขวง ศาลาธรรมสพ ,ก.ทม.10170.

Mobile:08-08-170-170 Tel: 02-885-2558 Fax: 02-885-2558

http://www.abb-furnace.com E-mail: sales@abb-furnace.com

| | | | |
|----------------------|---|---|---------------------------|
| <p>SMYT78 78x136</p> |  | <p>Materials: Cordierite CO Discharged: <0.06 Temperature softening: 1230°C Open Porosity: 61% Air consumption: 0.13kg/h Weight: 0.13kg/sheet</p> | <p>W78mmxL136mmxH13mm</p> |
| <p>SLWT 93x132</p> |  | <p>Materials: Cordierite CO Discharged: <0.06 Temperature softening: 1230°C Open Porosity: 61% Air consumption: 0.13kg/h Weight: 0.125kg/sheet</p> | <p>W93mmxL132mmxH13mm</p> |
| <p>SMYT 93x132</p> |  | <p>Materials: Cordierite CO Discharged: <0.06 Temperature softening: 1230°C Open Porosity: 61% Air consumption: 0.13kg/h Weight: 0.25kg/sheet</p> | <p>W93mmxL132mmxH13mm</p> |
| <p>SLWT 93x133</p> |  | <p>Materials: Cordierite CO Discharged: <0.06 Temperature softening: 1230°C Open Porosity: 61% Air consumption: 0.13kg/h Weight: 0.09kg/sheet</p> | <p>W93mmxL133mmxH13mm</p> |
| <p>SMYT 93x133</p> |  | <p>Materials: Cordierite CO Discharged: <0.06 Temperature softening: 1230°C Open Porosity: 61% Air consumption: 0.13kg/h Weight:</p> | <p>W93mmxL133xH13mm</p> |
| <p>SHGT+ 100x140</p> |  | <p>Materials: Cordierite CO Discharged: <0.06 Temperature softening: 1230°C Open Porosity: 61% Air consumption: 0.13kg/h Weight:</p> | <p>W100mmxL140xH13mm</p> |






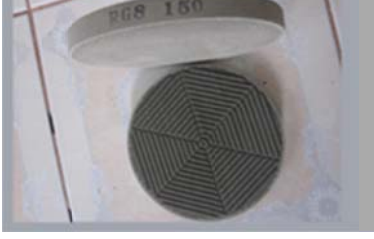


บริษัท เอบีพี เฟอร์เนส จำกัด
ABB FURNACE CO., LTD

129/15, ม.17 ถนนพหลโยธินซอย 2 ซอย 36 เขต ทวีวัฒนา แขวง ศาลาธรรมสพ ,ก.ทม.10170.

Mobile:08-08-170-170 Tel: 02-885-2558 Fax: 02-885-2558

<http://www.abb-furnace.com> E-mail: sales@abb-furnace.com

| | | | |
|---------------------|---|--|--------------------------|
| <p>SMYT 140x200</p> |  | <p>Materials: Cordierite CO Discharged: <0.06 Temperature softening: 1230°C Open Porosity: 61% Air consumption: 0.13kg/h Weight:</p> | <p>W140mmxL200xH13mm</p> |
| <p>RB8 100</p> |  | <p>Materials: Cordierite CO Discharged: Temperature softening: Open Porosity: Air consumption: Weight:</p> | <p>Φ 100mm</p> |
| <p>RG3 116</p> |  | <p>Materials: Cordierite CO Discharged: Temperature softening: Open Porosity: Air consumption: Weight:</p> | <p>Φ 116mm</p> |
| <p>RGX 129</p> |  | <p>Materials: CO Discharged: Temperature softening: Open Porosity: Air consumption: Weight:</p> | <p>Φ 129mm</p> |
| <p>RG8 135</p> |  | <p>Materials: CO Discharged: Temperature softening: Open Porosity: Air consumption: Weight:</p> | <p>Φ 135mm</p> |
| <p>RG8 150</p> |  | <p>Materials: CO Discharged: Temperature softening: Open Porosity: Air consumption: Weight:</p> | <p>Φ 150mm</p> |



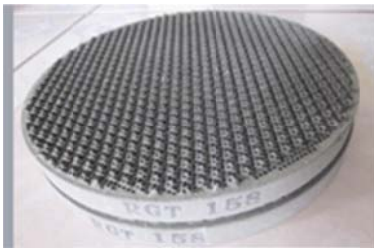


บริษัท เอบี เฟอเรนส จำกัด
ABB FURNACE CO., LTD

129/15, ม.17 ถนนพุทธิมณฑลสาย 2 ซอย 36 เขต ทวีวัฒนา แขวง ศาลาธรรมสพ ,ก.ทม.10170.

Mobile:08-08-170-170 Tel: 02-885-2558 Fax: 02-885-2558

http://www.abb-furnace.com E-mail: sales@abb-furnace.com

infrared ceramic plate specifications (4)

| | | | |
|----------|--|---|---------|
| RGT 158 |  | Materials: CO Discharged: Temperature softening: Open Porosity: Air consumption: Weight: | Φ 158mm |
| RSG3 162 |  | Materials: CO Discharged: Temperature softening: Open Porosity: Air consumption: Weight: | Φ 162mm |
| RSG3 168 |  | Materials: CO Discharged: Temperature softening: Open Porosity: Air consumption: Weight: | Φ 168mm |



บริษัท เอบีบี เฟอร์เนส จำกัด
ABB FURNACE CO., LTD

129/15, ม.17 ถนนพุทธมณฑลสาย 2 ซอย 36 เขต ทวีวัฒนา แขวง ศาลาธรรมสพ ,ก.ทม.10170.

Mobile:08-08-170-170 Tel: 02-885-2558 Fax: 02-885-2558

<http://www.abb-furnace.com> E-mail: sales@abb-furnace.com